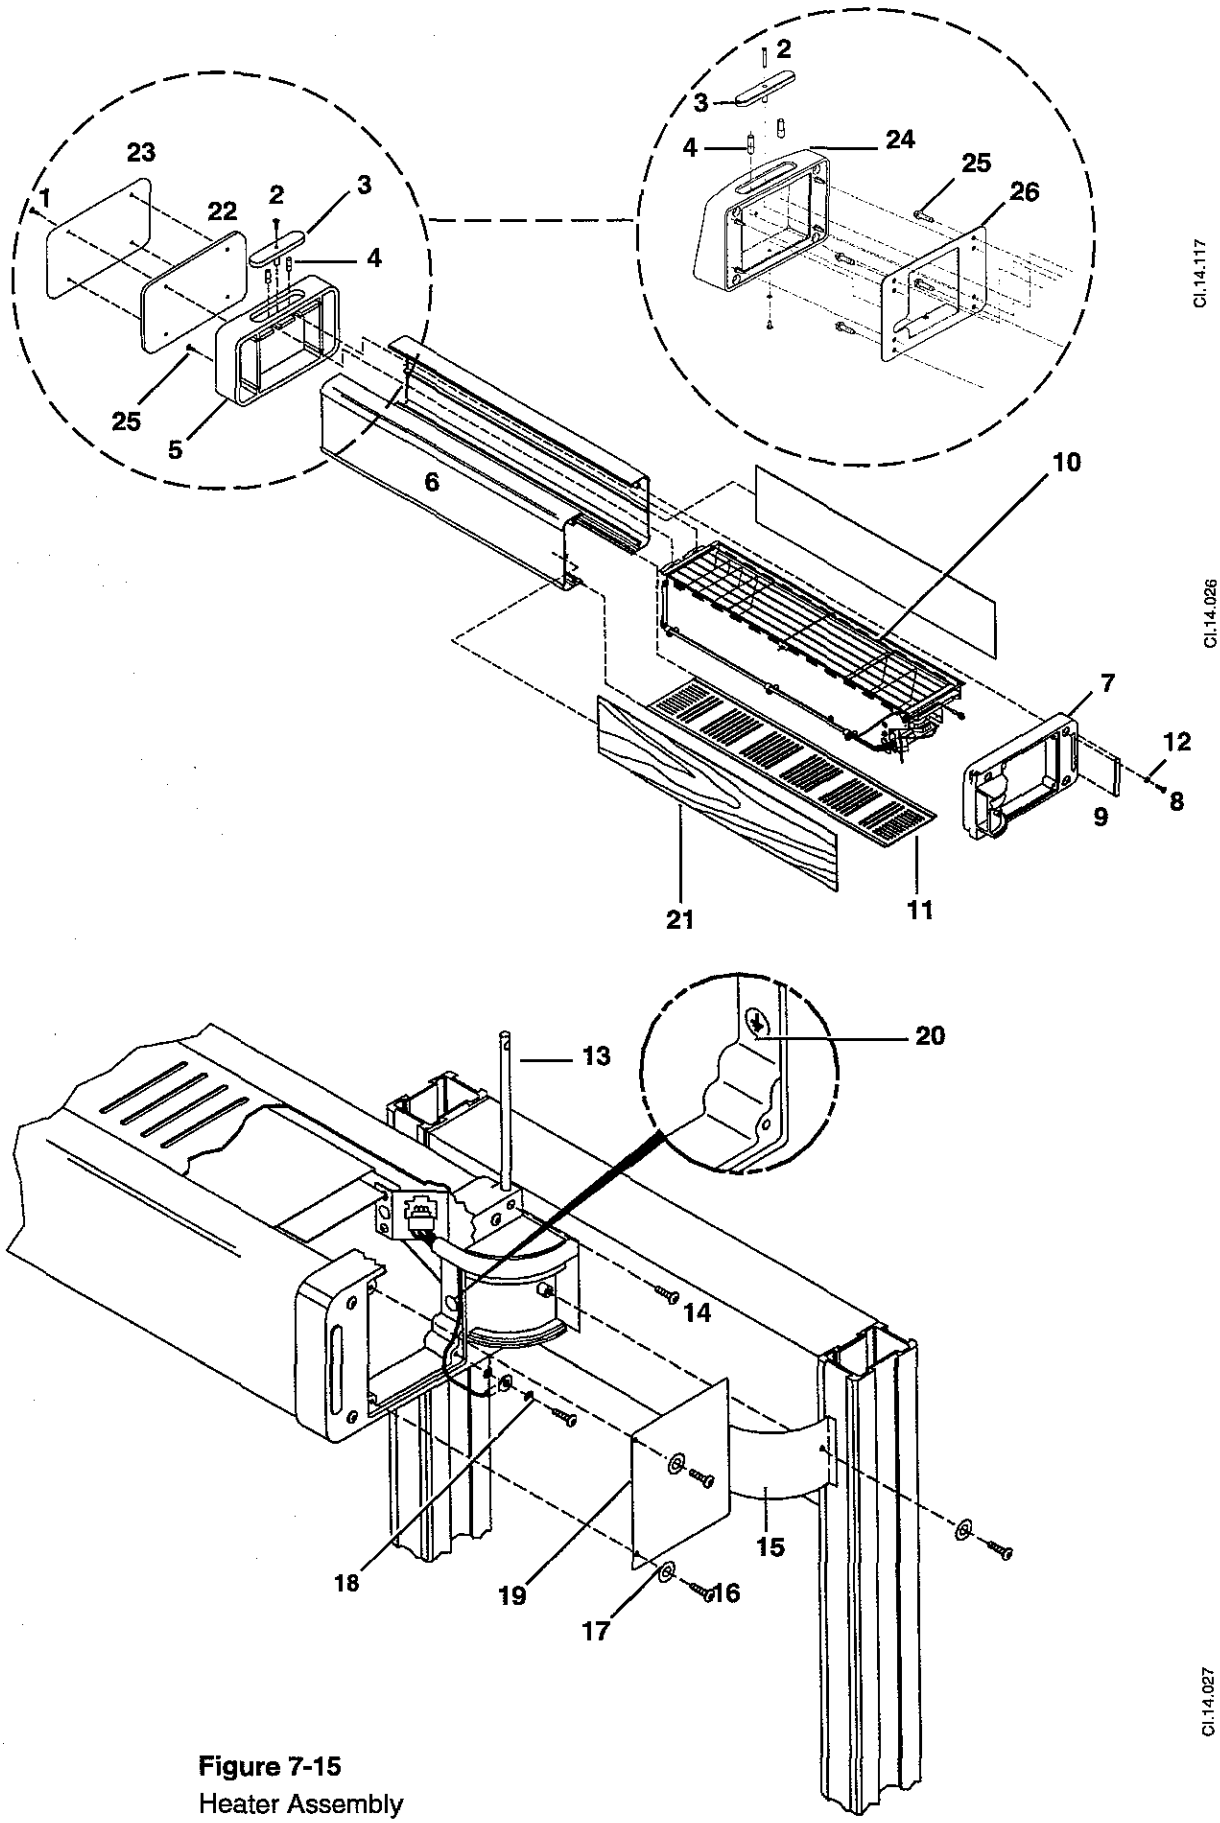

Figure 7-15
Heater Assembly

7.16 Infant Warmer Heater Wiring

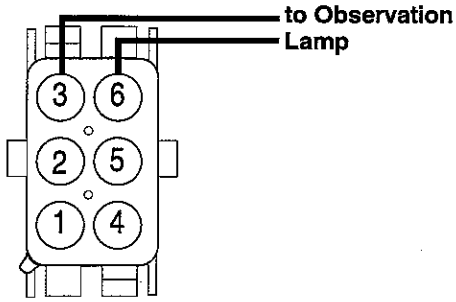

**Top View
Plug Diagram
(Item 8)
Units without HCA serial numbers**

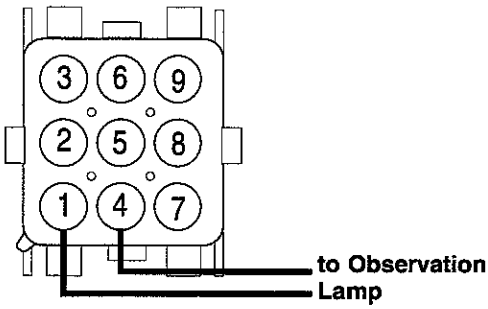

**Top View
Plug Diagram
(Item 8)
Units with HCA or HCC
serial numbers**

CI.14.091

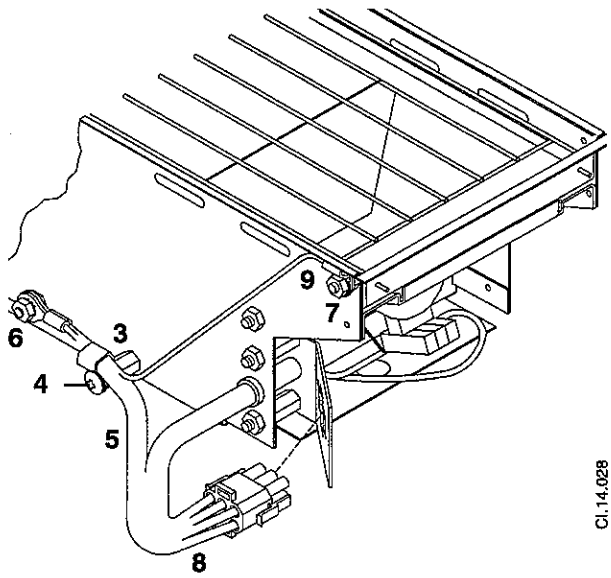

CI.14.028

	Description	Stock Number
1.	Connector Adapter, Faston	0208-0511-300
2.	External Lock Washer #10	0202-3210-340
3.	Cable Clamp, Nylon Type n-2	0208-0446-300
4.	Lock washer Ext-6	6600-0259-400
5.	Screw 6-32 x 3-8	0140-6624-106
6.	Nut, 8-32 w/External Lock washer	0202-1131-300
7.	Nut, 6-32 w/External Lock Washer	6600-0382-400
8.	Lamphouse Wiring Harness	
	Model 2001, Series 3000 with HAK or AAN serial number	0208-6180-700
	Model 5000 with AAN serial number	6600-0005-700
	Model 2001, Series 3000 with HCA or HCC serial number	6600-0343-700
	Model 5000, Series 4000 with HCA or HCC serial number	6600-0335-700
9.	Cable Clamp	0208-0331-300

Units with HAK, HAJ or AAN serial number

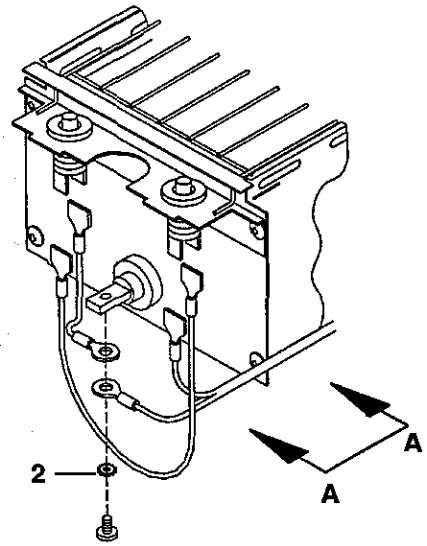

220/240V
Wiring Configuration

Units with HCA serial number

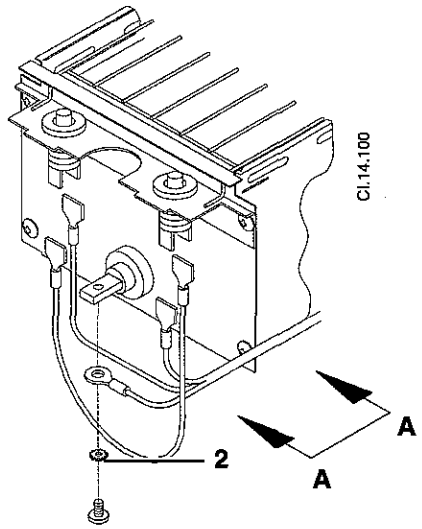

220/230/240V
Wiring Configuration

Units with HCC serial number

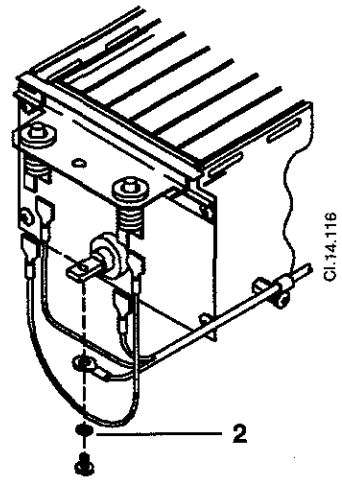

220/230/240V
Wiring Configuration

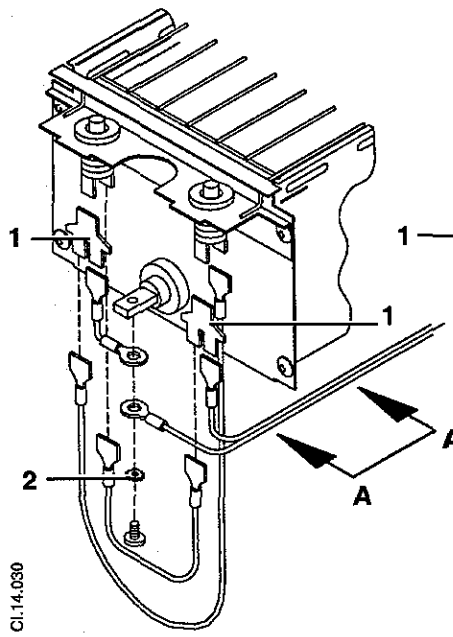

100/120V
Wiring Configuration

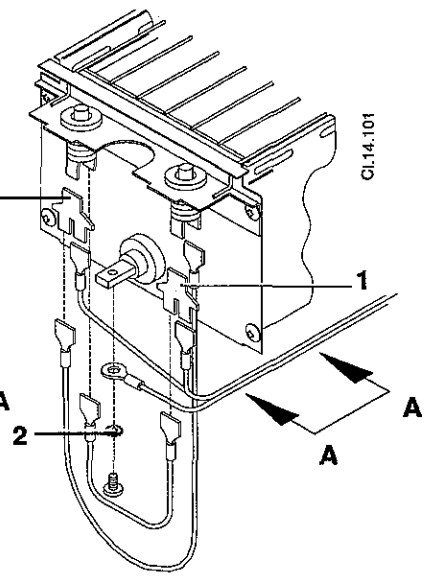

100/120V
Wiring Configuration

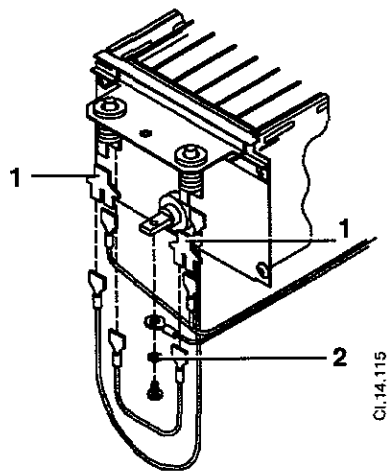

100/120V
Wiring Configuration

View A-A shown on page 7-33

Figure 7-16
Infant Warmer Heater Wiring

7.17 Infant Warmer Assembly

	Description	Stock Number
1.	Screw 6-32 x 1/2	0140-6124-108
2.	Lamp Socket Sylvania #31099	0686-9000-416
	Lamp GTE Sylvania 120MB 6W	0690-2100-315
3.	Alarm Light Bracket -	
	units with HAK, AAN or HCA serial number	0214-1567-500
	Alarm Light Bracket - unit with HCC serial number	6600-0842-500
4	Front Reflector End Cap	0217-5213-500
5.	Heater Tube	
	120V 440W (2001/series 3000 with HAK, HAJ or AAN)	6600-0284-800
	220V 440W (2001/series 3000 with HAK, HAJ or AAN)	6600-0285-800
	230/240V 440W (2001/series 3000 with HAK, HAJ or AAN)	6600-0286-800
	100V 440W (2001/series 3000 with HAK, HAJ or AAN)	6600-0287-800
	120V 540W (5000/series 4000)	6600-0280-800
	220V 540W (5000/series 4000)	6600-0281-800
	240V 540W (5000/series 4000)	6600-0282-800
	100V 540W (5000/series 4000)	6600-0283-800
	120V 540W (model 2001/series 3000 w/HCA or HCC)*	6600-0014-850
	220V 540W (model 2001/series 3000 w/HCA or HCC)*	6600-0015-850
	230/240V 540W (model 2001/series 3000 w/HCA or HCC)*	6600-0016-850
	100V 540W (model 2001/series 3000 w/HCA or HCC)*	6600-0017-850
6.	Nut, #6-32 w/Ext Lock washer	6600-0382-400
7.	Washer	6600-0378-400
8.	Spring	6600-0019-300
9.	Nut	6600-0111-400
10.	Rear Reflector Cap	0217-5212-500
11.	Wire Harness Socket Bracket	0214-1566-500
12.	External lock washer #6	6600-0259-400
13.	Screw, 6-32 x 1/4	6600-0389-400
14.	Exam Light Lens 3 x 5	0217-5306-300
15.	Nut, Keps 4-40	6600-0073-400
16.	Washer #4	6600-0358-400
17.	Lamp holder Bracket	0217-5214-500
18.	Lamp holder kit	
	Units with AAN, HAJ, or HAK serial numbers (sockets)	6600-0010-850
	Units with HCA or HCC serial numbers (pins)	6600-0011-850
19.	Screw, 4-40 x 5/16	6600-0388-400
20.	Lamp 12V 50W GE EXZ(Q50 MR16/NFL)	
	or GE EXN(Q50 MR16/FL)	0208-0516-300
21.	Screw, 6-32 x 1/2	0140-6124-108
22.	Spacer 1/4" Hex 6-32 .75L	0402-0234-300
23.	Snap Bushing 3/8 I.D. for .50 Hole	6600-0519-500
24.	Nut, #6-32 w/Ext Lock washer	6600-0382-400
25.	Hole Plug	6600-0392-400
26.	Insulator Fishpaper	6600-0002-300
27.	Screw 6-32 x 7/8	0140-6124-114
28.	Heater grille, series 3000	6600-0027-500
	Heater grille, series 4000	6600-0007-700

* These tubes are designed for newer units (with HCA and HCC serial number) that have 540 watts heaters. Placing these tubes in older 440 watts unit will cause equipment damage.

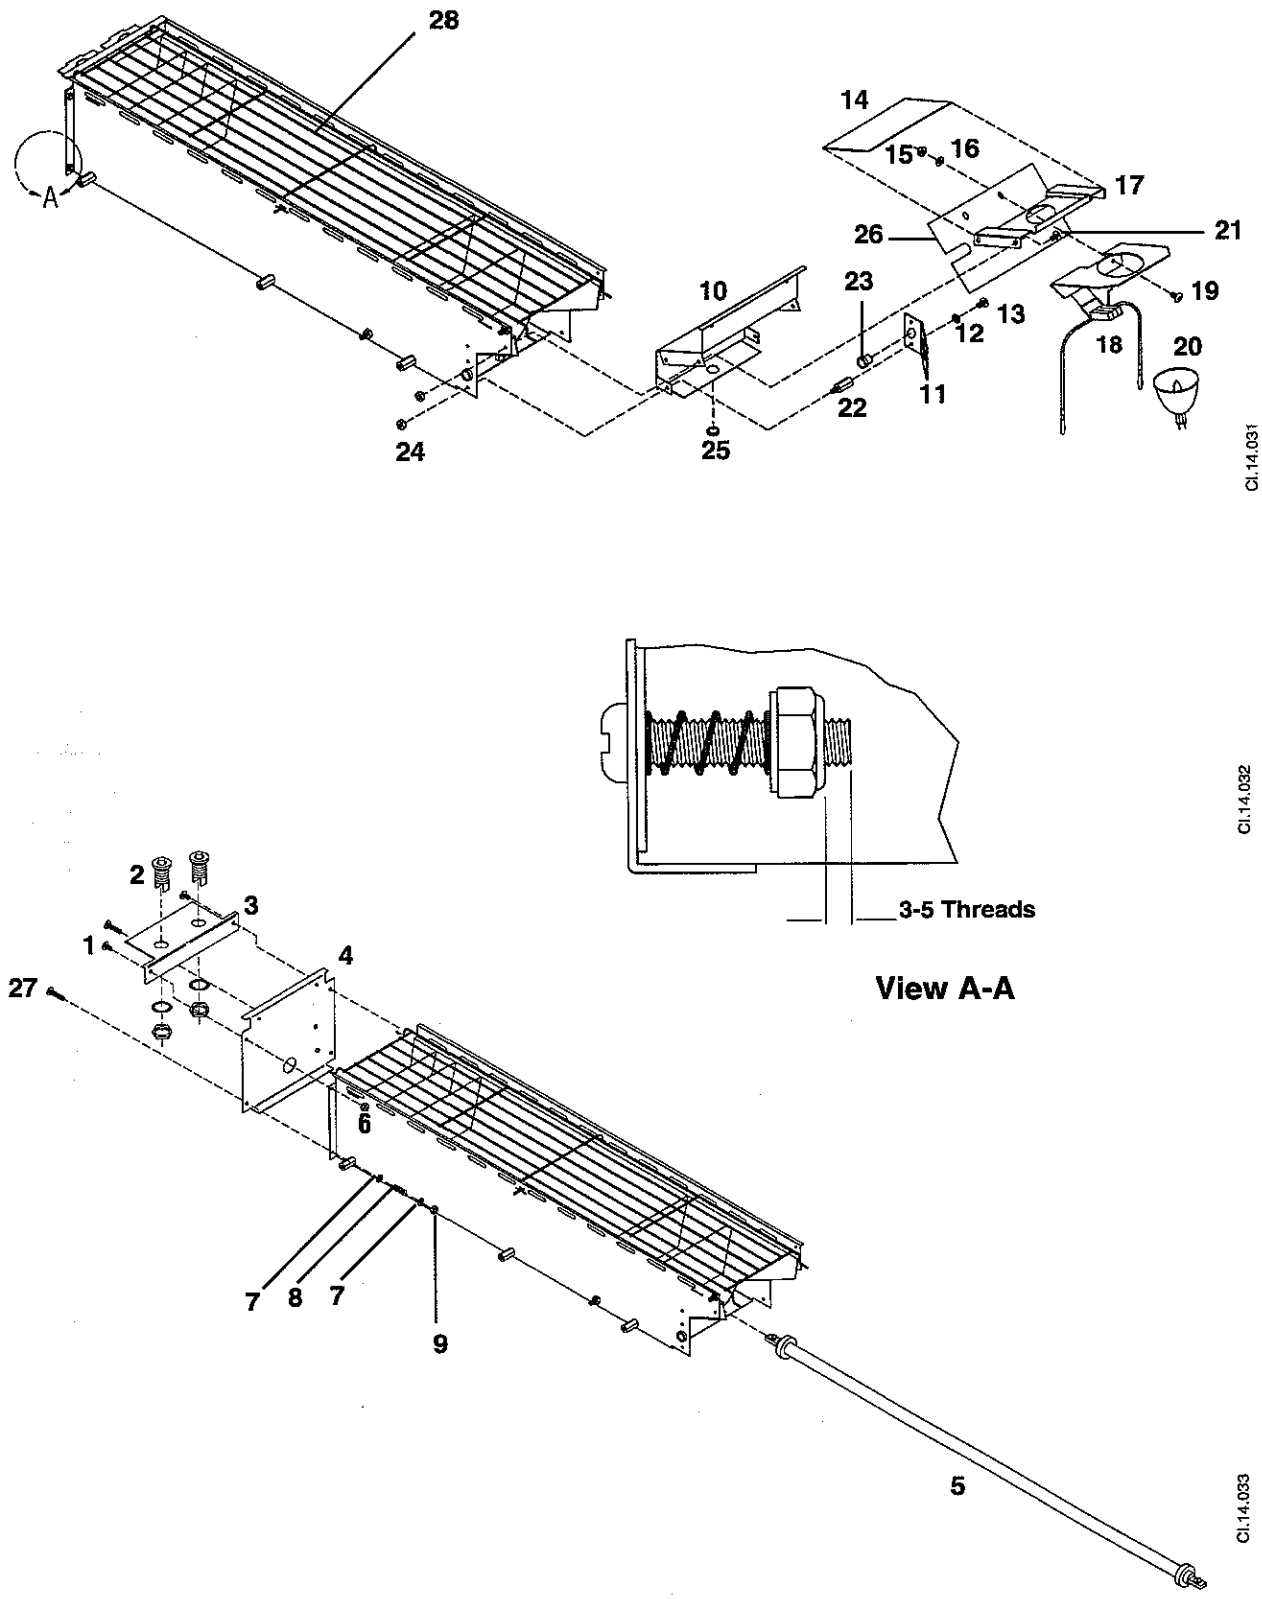

Figure 7-17
Infant Warmer Assembly

7.18 Bed Assembly

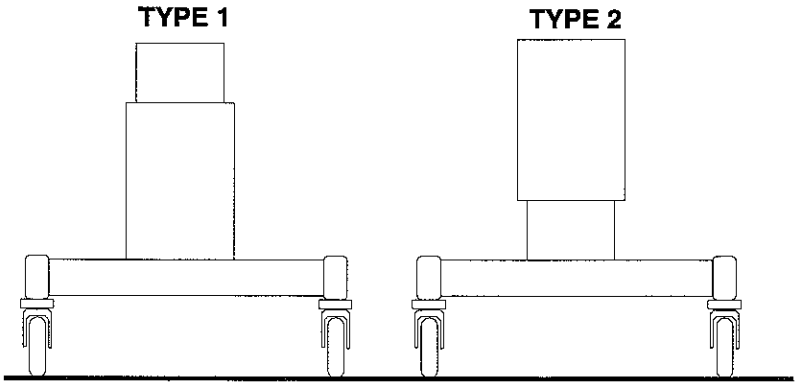

CI.07.068

Description		Stock Number
1.	Elastic Nut 5/16-24	0202-1017-300
2.	Screw 10-24 x 3/8	6600-0250-400
3.	Lock washer #10	0144-1110-131
4	Tubing Cover Plate, small bed - series 3000	0214-2268-511
	Tubing Cover Plate, large bed - series 4000	6600-1035-500
5.	Tilt Plate Cover (light grey) small bed - series 3000	6600-0807-501
	Tilt Plate Cover (light grey) small bed - series 4000	6600-1061-500
6.	Tubing Actuator Rod	0217-5323-500
7.	Extension Spring	6600-0013-300
8.	Bed Tilt Lever (black)	0217-5277-100
	Bed Tilt Lever (grey)	6600-0800-501
9	Pin	0217-5321-500
10	Hydraulic System Assembly (includes item 11)	6600-0325-800
11.	Ball Joint	0217-5318-300
12.	Valve Bed Hydraulic Plate	0217-5283-100
13.	Bed (Series 3000, except 3500) - light grey	6600-0814-501
	Bed (Series 4000) - light grey	6600-0818-501
	Bed (Series 3000, except 3500) - beige	0217-5316-100
	Bed (Series 4000) - beige	0217-5381-100
14.	Pin	0217-5322-500
15.	Pivot Rod	0217-5312-549
16.	Corner Block- grey (pkg 4 - includes items 2, 19, 22 & 23)	6600-0228-801
	Corner Block- black (pkg 4 - includes items 2, 19, 22 & 23)	6600-0228-800
17.	Rod	0217-5313-300
18.	Hook	0203-5194-300
19.	O-ring	6600-0348-400
20.	Bed support (beige) except type 2 elevating units	0217-5310-210
21.	Bed support - Type 2 elevating units (beige)	6600-0717-502
	Bed support - Units with HCC serial number only (light grey)	6600-0717-501
22.	Bearing	0209-0079-300
23.	Split ring lock washer, #10	6600-0322-400
24.	Washer, flat	0202-4518-340

Parts not shown

	Replacement Bed Assembly (includes items 1 - 24)	0217-5385-810

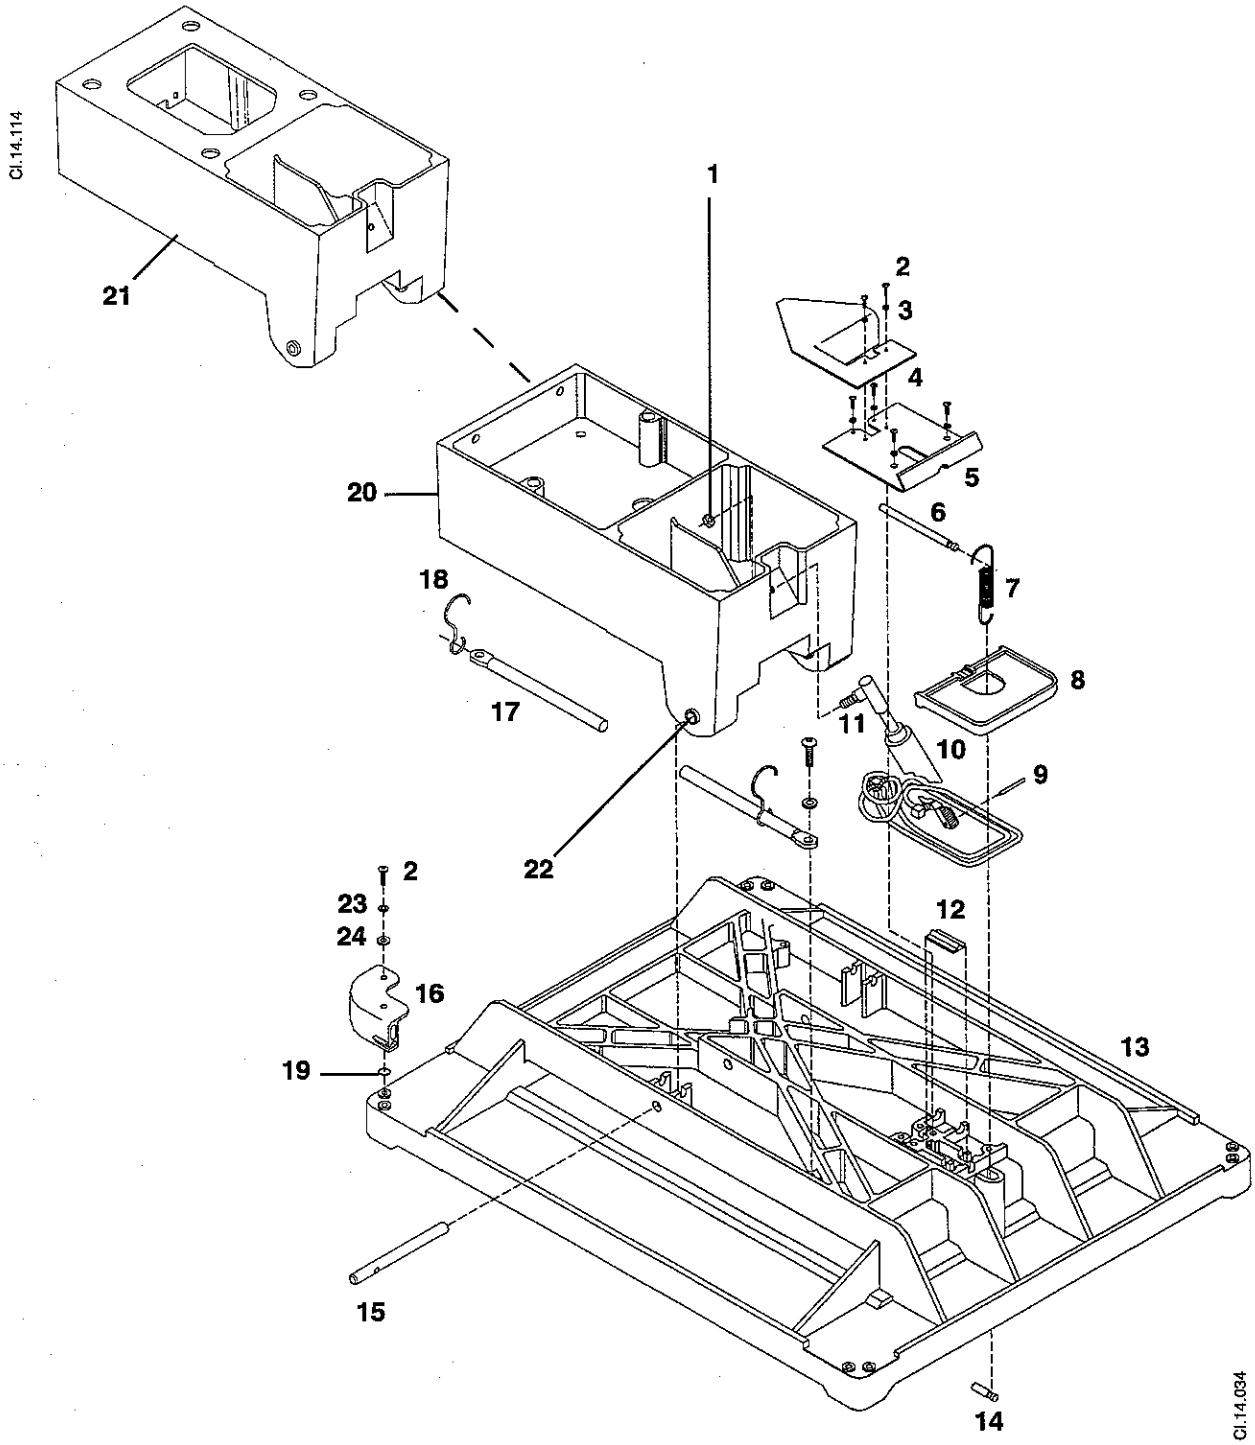

Figure 7-18
Bed Assembly

7.19 Wood Accent Parts

Determine the wood shade by the last three digits of the part number on the unit:

900 = natural oak	901 = bleached oak	902 = medium oak
903 = dark oak	904 = cherry maple	905 = natural maple
906 = bleached maple	907 = special stain, contact service support	

Description	Stock Number
1. Wood Heater Head Insert	
Series 3000 (short), Natural Oak	6600-1025-501
Series 3000 (short), Bleached Oak	6600-1025-502
Series 3000 (short), Medium Oak	6600-1025-503
Series 3000 (short), Dark Oak	6600-1025-504
Series 3000 (short), Cherry Maple	6600-1025-505
Series 3000 (short), Natural Maple	6600-1025-506
Series 3000 (short), Bleached Maple	6600-1025-507
Series 4000 (long), Natural Oak	6600-1026-501
Series 4000 (long), Bleached Oak	6600-1026-502
Series 4000 (long), Medium Oak	6600-1026-503
Series 4000 (long), Dark Oak	6600-1026-504
Series 4000 (long), Cherry Maple	6600-1026-505
Series 4000 (long), Natural Maple	6600-1026-506
Series 4000 (long), Bleached Maple	6600-1026-507
2. Wood Upright Insert	
Model 3300 & 4300, Natural Oak	6600-1030-501
Model 3300 & 4300, Bleached Oak	6600-1030-502
Model 3300 & 4300, Medium Oak	6600-1030-503
Model 3300 & 4300, Dark Oak	6600-1030-504
Model 3300 & 4300, Cherry Maple	6600-1030-505
Model 3300 & 4300, Natural Maple	6600-1030-506
Model 3300 & 4300, Bleached Maple	6600-1030-507
Model 3400 & 4400 (elevating), Natural Oak	6600-1031-501
Model 3400 & 4400 (elevating), Bleached Oak	6600-1031-502
Model 3400 & 4400 (elevating), Medium Oak	6600-1031-503
Model 3400 & 4400 (elevating), Dark Oak	6600-1031-504
Model 3400 & 4400 (elevating), Cherry Maple	6600-1031-505
Model 3400 & 4400 (elevating), Natural Maple	6600-1031-506
Model 3400 & 4400 (elevating), Bleached Maple	6600-1031-507
3. Standard Wood Drawer Package Assembly	
(fits all Series 3000, small bed, & 4000, large bed, and rotating drawer units)	
Natural Oak	6600-0612-801
Bleached Oak	6600-0612-802
Medium Oak	6600-0612-803
Dark Oak	6600-0612-804
Cherry Maple	6600-0612-805
Natural Maple	6600-0612-806
Bleached Maple	6600-0612-807
Pass through Wood Drawer Package Assembly	
(fits Series 3000 small bed units)	
Natural Oak	6600-0626-801
Bleached Oak	6600-0626-802
Medium Oak	6600-0626-803
Dark Oak	6600-0626-804
Cherry Maple	6600-0626-805
Natural Maple	6600-0626-806
Bleached Maple	6600-0626-807
Parts not shown	
Slides for standard wooden drawers(2 slides, left or right)	6600-0779-206
Slides for pass through wooden drawers(2 slides, left or right)	6600-0779-207
Drawer lock	6600-0779-201

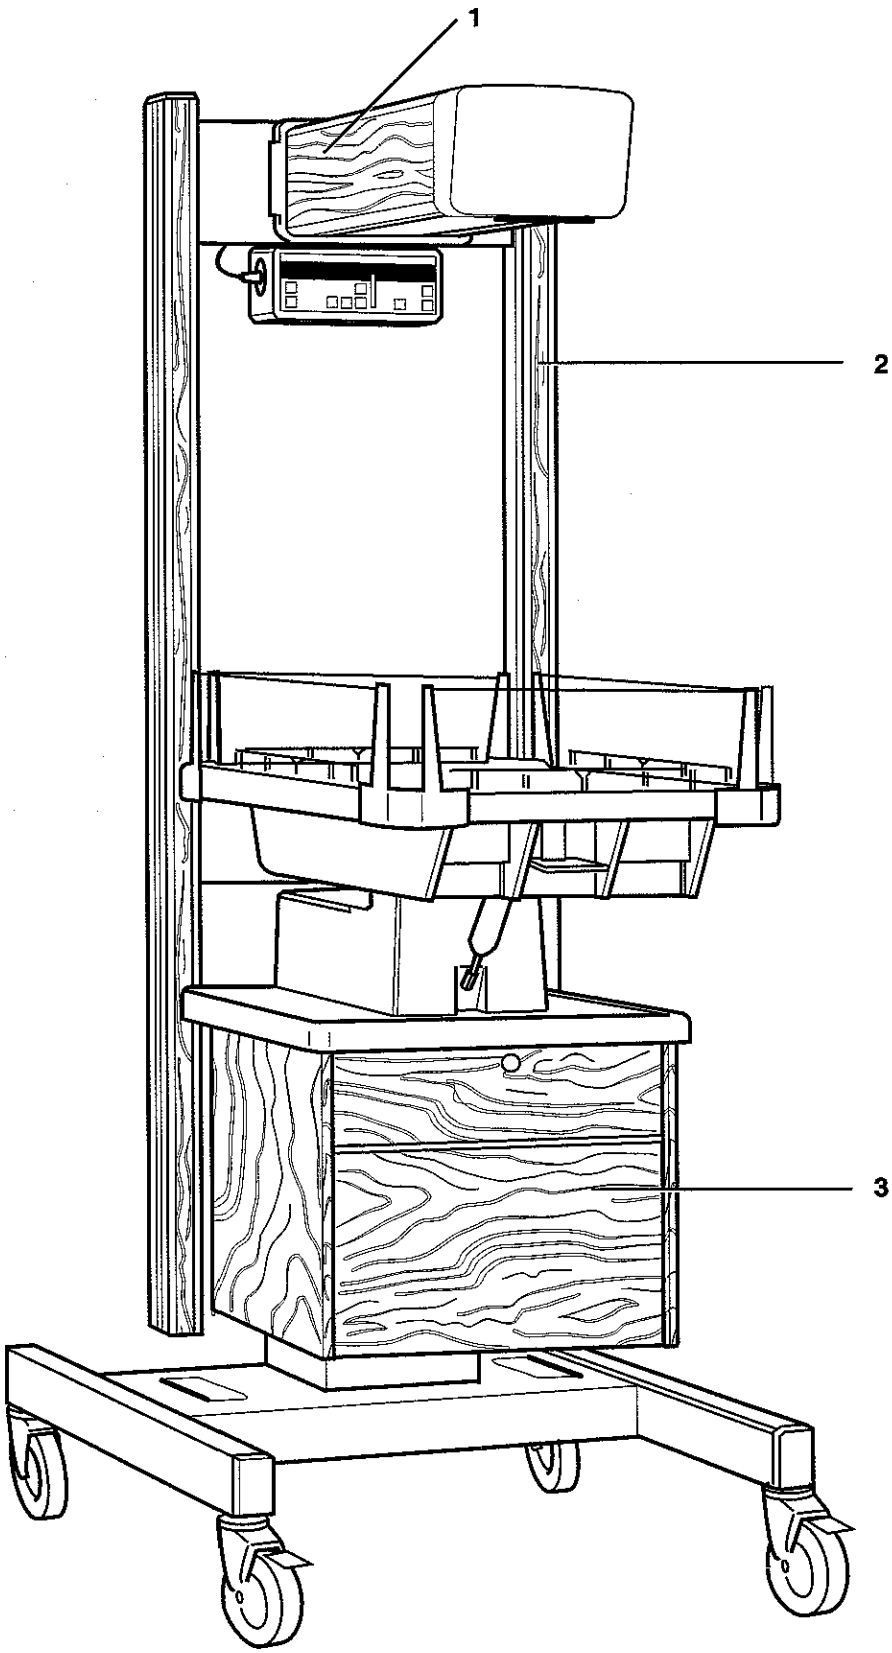

Figure 7-19
Wood Accent Parts

7.20 Well Baby Bassinet

Description	Stock Number
Casters, locking	6600-0567-400
Casters, non-locking	6600-0566-400
Flip up shelf label	6600-1992-101
Shelf support hinge	6600-0779-204
Drawer weight label	6600-1998-101
Drawer lock	6600-0779-201
Drawer slides (2-left and right)	6600-0779-203
Plexiglass chart holder window	6600-0779-202
Tub model only	
Tub	6600-1006-500
Mattress for tub model (26.5" x 13")	6600-0998-500
Tub grommet	6600-0779-205
Side panel model only	
Mattress for side panel model (26.5" x 18")	6600-0999-500
Corner block kit (includes 4 blocks)	6600-0230-802
Mounting screw, 10-24 x 3/4	0400-3118-300
Lock washer, #10 split ring	6600-0322-400
Washer, .193 ID x .375 OD	0402-0739-300
Side panel assembly (left and right)	6600-0176-704
Side panel assembly (front and rear)	6600-0176-705
Side panel window (left and right)	6600-1003-500
Side panel window (front and rear)	6600-1002-500
Side panel extrusion (left and right)	6600-1001-500
Side panel extrusion (front and rear)	6600-1000-500
Side panel end bracket	6600-0810-501
Side panel spring	0203-3262-300
Side panel support button	0217-5275-100
Side panel mounting screw*	0144-2130-224
Side panel warning label	6600-1959-101

* Apply Loctite 242 (0220-5016-300)

Side Panel Model

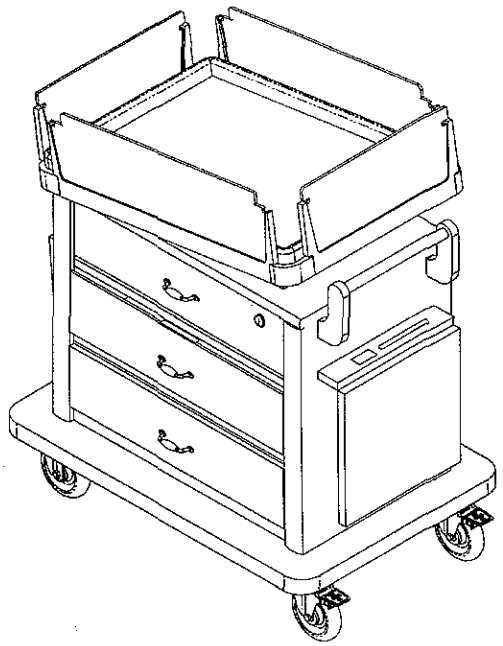

Side Panel Assembly

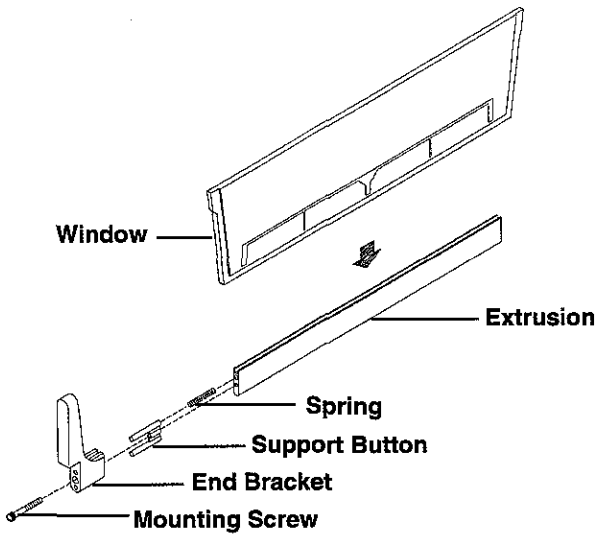

Tub Model

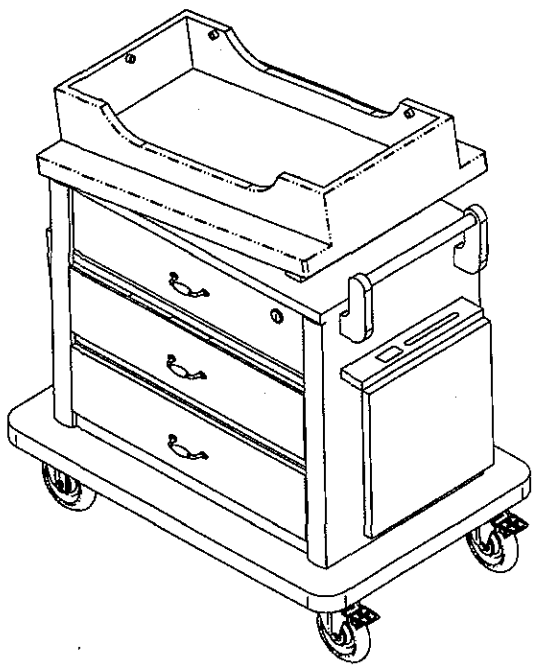

CI.14.038,180,181

Figure 7-20
Well Baby Bassinet

7.21 Bed Assembly

See page 7-46 for Model 3500 bedsides

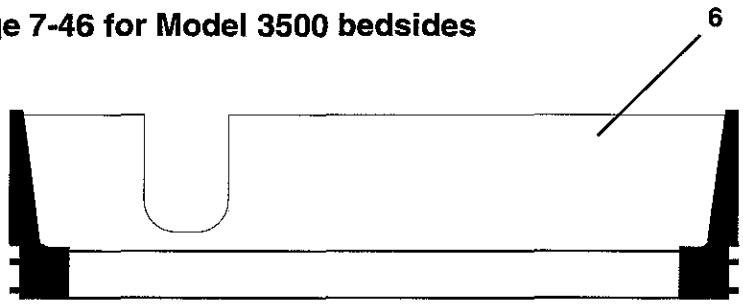

CI.14.160

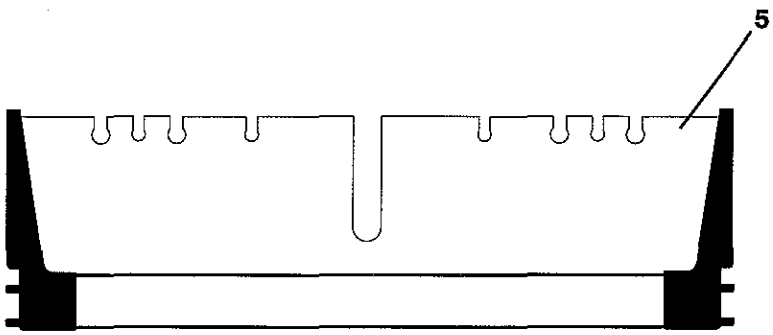

CI.05.038

Description	Stock Number
1. Foam Mattress	
Model 2001 and 3300	0305-5060-300
Model 4300, 4400 & 5000	0305-5061-300
2. Clear Plastic Bed Support	0217-5221-300
3. Left and Right Bed Side Panel **	
Model 2001 and 3300, 20" - black (new)*	6600-0005-800
Model 4300, 4400 & 5000, 25" - black	6600-0009-700
Model 2001, 3300 & 3400, 20" - grey	6600-0004-853
Model 4300 and 4400, 25" - grey	6600-0004-854
4. Front and Rear Bed Side**	
Model 2001 and 3300, 15" - black (new)*	6600-0004-800
Model 4300, 4400 & 5000, 18" - black	6600-0008-700
Model 2001, 3300 & 3400, 15" - grey	6600-0004-855
Model 4300 and 4400, 18" - grey	6600-0004-856
5. Tubing Organizer Panel†	
Model 2001 and 3300 - black	6600-0004-801
Model 4300, 4400 & 5000 - black	6600-0004-802
Model 2001, 3300 & 3400 - grey	6600-0004-857
Model 4300 and 4400 - grey	6600-0004-858
6. HFOV Panel‡	
Model 2001, 3300 & 3400, 20" - grey	6600-0167-716
Model 4300 and 4400, 25" - grey	6600-0167-718

* For older units where the end bracket differs from that shown (see page 7-40) order

Left and Right Bed Side Panel (old)	0217-5361-811
Front and Rear Bed Side (old)	0217-5361-810

† Tubing Organizer panel used for rear bedside only.

‡ HFOV panels can be used as side bedside panel only.

** Decals not included - refer to page 7-36 for part numbers.

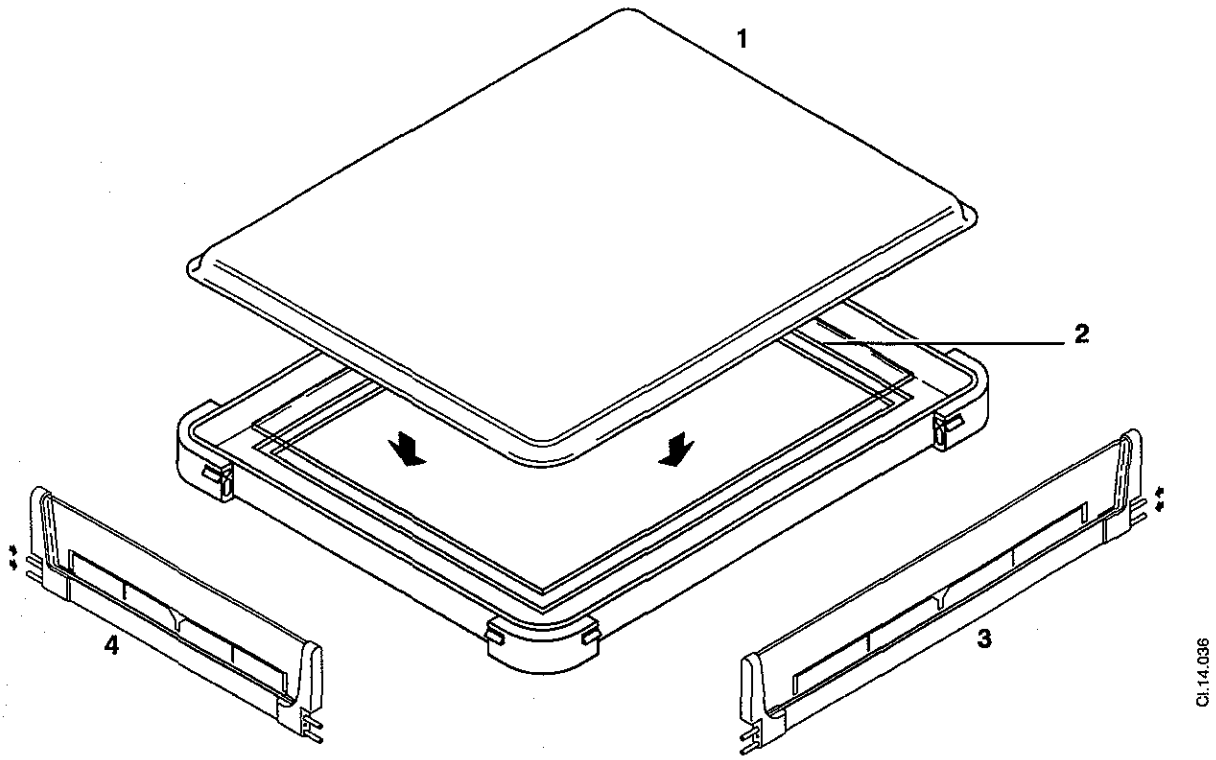

Figure 7-21
Bed Assembly except model 3500

7.22 Bedside Assembly

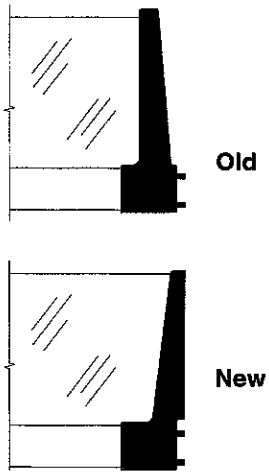

Cl.14.037

	Description	Stock Number
1.	Window, Front and Rear^	
	Model 2001, 3300 & 3400 (new)	6600-0021-500
	Model 2001 and 3300 (old)	0212-1001-300
	Model 4300, 4400 & 5000	0212-1003-300
	Model 3500§	6600-0325-500
	Window, Left and Right	
	Model 2001, 3300 & 3400 (new)	6600-0022-500
	Model 2001 and 3300 (old)	0212-1002-300
	Model 4300, 4400 & 5000	0212-1004-300
	Model 3500§	6600-0326-500
	HFOV panel window (4300, 4400 & 5000)	6600-0857-501
	HFOV panel window (2001, 3300 & 3400)	6600-0857-502
	Tubing Organizer Panel†	
	Model 2001, 3300 & 3400	6600-0567-500
	Model 4300, 4400 & 5000	6600-0566-500
2.	Extrusion, Front and Rear^	
	Model 2001, 3300, 3400 & 3500	0217-5280-300
	Model 4300, 4400 & 5000	0217-5183-300
	Extrusion, Left and Right	
	Model 2001, 3300, 3400 & 3500	0217-5281-300
	Model 4300, 4400 & 5000	0217-5184-300
3.	Spring	0203-3262-300
4.	Support Button - black	0217-5275-100
	Support Button - grey	6600-0603-401
5.	End Bracket (new) - black	0217-5291-100
	End Bracket - grey	6600-0810-501
	End Bracket (old)	0217-5279-100
6.	Mounting Screw*	0144-2130-224
7.	Side panel decal set (includes decals for all four panels)	
	Model 2001 and series 3000	6600-1530-100
	Model 4300, 4400 & 5000	6600-1531-100

* Apply Loctite 242 Stock No. 0220-5017-300

§ Model 3500 windows may be used on Model 3300 beds if higher bed sides are required.

† Tubing Organizer panel used for rear bedside only.

^ Decal not included - order item 7

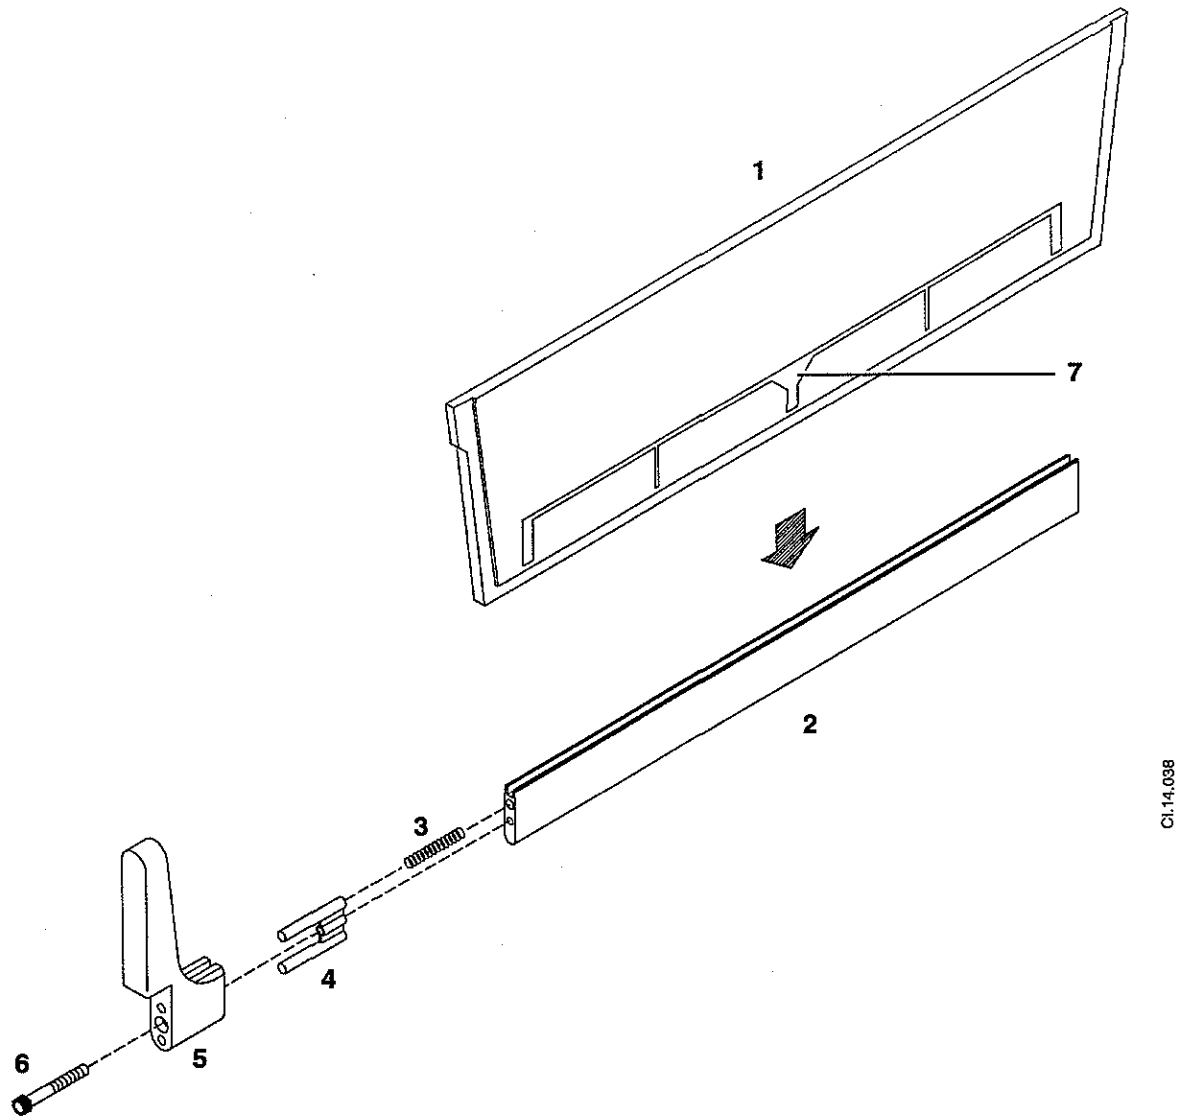

Figure 7-22
Bedside Assembly

7.23 X-ray tray assembly

Description	Stock Number
Grey parts	
1. X-ray tray, small bed, light grey (includes item 5)	6600-0003-854
X-ray tray, large bed, light grey (includes item 5)	6600-0003-855
2. Tray slide, small bed, light grey (1 slide only)	6600-0564-502
Tray slide, large bed, light grey (1 slide only)	6600-0564-503
3. Slide knob, light grey	6600-0549-400
4. Slide knob spacer, small bed	6600-0565-500
Large bed	6600-0565-501
5. Tray label set	6600-1992-101
Beige parts	
1. X-ray tray, small bed, beige only (includes item 5)	6600-0003-852
X-ray tray, large bed, beige only (includes item 5)	6600-0003-853
2. Tray slides kit (2) (includes items 3 & 4)	
small bed, beige only	6600-0004-850
large bed, beige only	6600-0004-851
3. Slide knob, beige	0212-1936-300
4. Slide knob spacer, small bed	6600-0565-500
large bed	6600-0565-501
5. Tray label set	6600-1537-100

Parts not shown

Window decal sets (Shown on page 7-37)	
Small bed	6600-0005-850
Large bed	6000-0005-851
X-ray tray upgrade kit (includes all items above)	
Small bed, beige only	6600-0003-850
Large bed, beige only	6600-0003-851

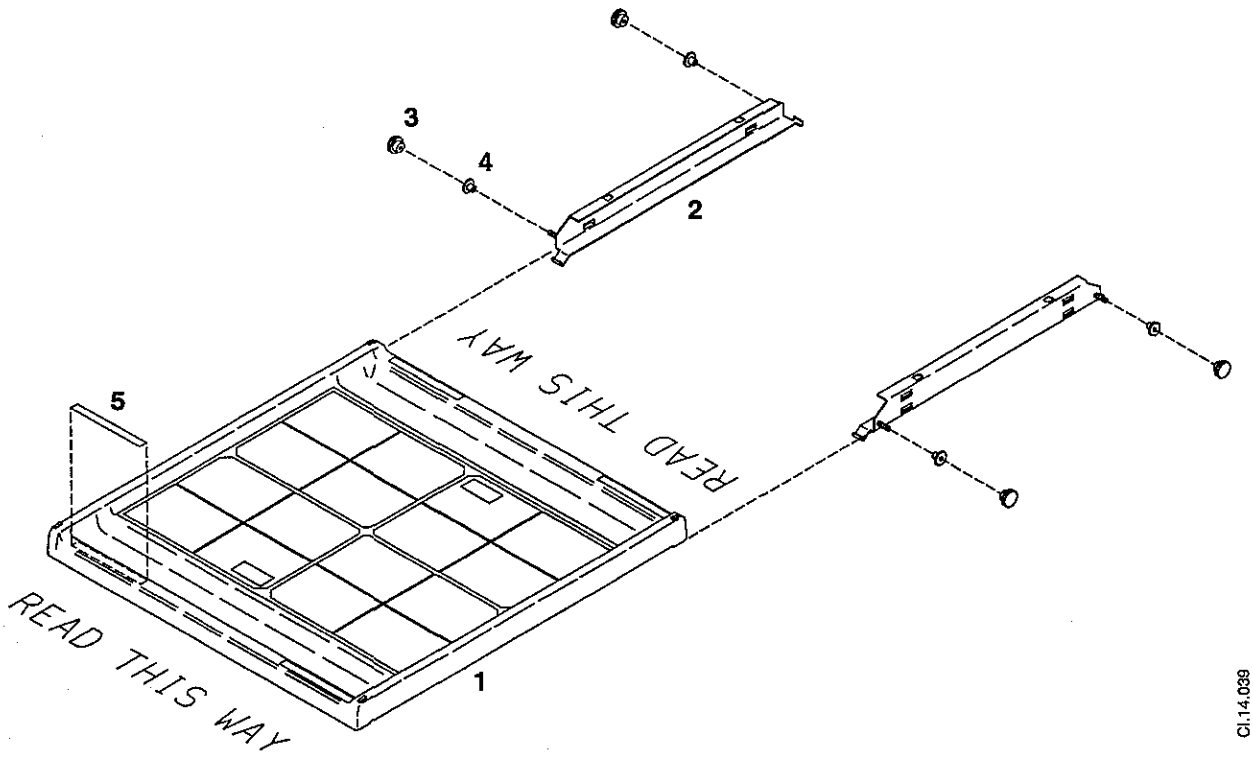

Figure 7-23
X-ray tray assembly

7.25 Model 3500 Bassinet

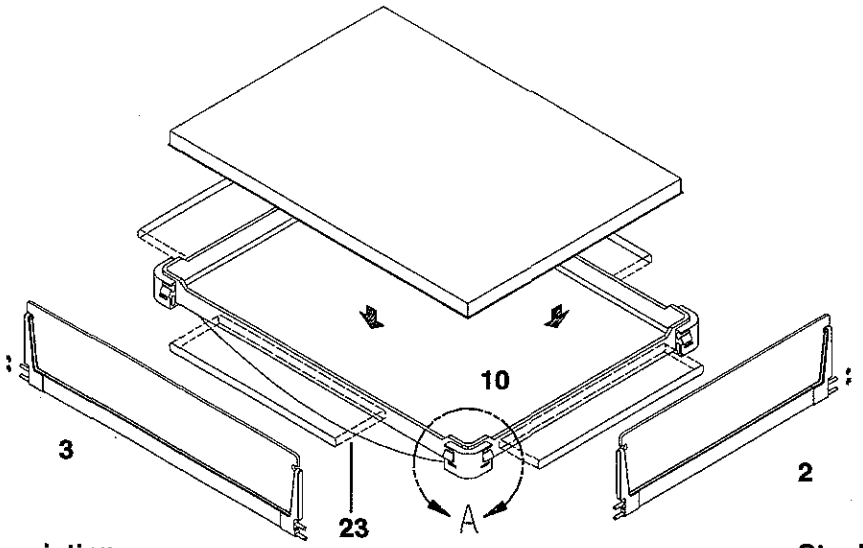

	Description	Stock Number
1.	Mattress, Foam, Poly	0305-5060-300
2.	Window, Bed Side, black, Front and Rear	6600-0176-700
	Window, Bed Side, grey, Front and Rear	6600-0176-702
3.	Window, Bed Side, black, Left and Right	6600-0176-701
	Window, Bed Side, grey, Left and Right	6600-0176-703
4	Collar, Setscrew, 0.5 Dia	6600-0169-400
5.	Spring, Comp, Tilt	6600-0168-400
6.	Handle, Inner Adj*	6600-0284-500
7.	Tube Handle, Inner Coupler	6600-0309-500
8.	Screw, 10-24 x 3/8	6600-0250-400
9.	Washer, lk, #10, slit ring	6600-0322-400
10.	Corner Block, locking, black (includes 8, 9, 24 & 25)	6600-0185-700
	Corner Block, locking, grey (includes 8, 9, 24 & 25)	6600-0185-701
	Corner Block, locking, black (Pkg 4 - includes 8, 9, 24 & 25)	6600-0230-800
	Corner Block, locking, grey (Pkg 4 - includes 8, 9, 24 & 25)	6600-0230-801
11.	Label Lot ID	6600-0541-100
12.	Bed assembly, beige (includes everything shown on page 7-47)	6600-0191-700
	Bed assembly, grey (includes everything shown on page 7-47)	6600-0191-701
13.	Bushing, Pivot, Bed**	6600 0288-500
14	Ring, Truarc, .500 Shaft	0203-5227-300
15.	Rod, Pivot, Bed Tilt	6600-0285-500
16.	Spacer, Index Tilt	6600 0304-500
17.	Pin, Spring, .094 x 0.5 sst	6600-0170-400
18.	Spacer	6600-0287-500
19.	Pin, Indexing, Tilt	6600-0286-500
20.	O-ring, .375 ID .562	6600-0402-400
21.	Screw, 1/4-20 x .625, rh, ph, sst†	6600-0394-400
22.	Handle, Outer Fixed	6600-0283-500
23.	Label, Warning, Bedside, 3500 IWS	See label section
24.	Flat Washer	0202-4518-340
25.	O-ring	6600-0348-400

* Apply Loctite 290 Stock No. 0220-5031-300 to the curved end which fits into the inner coupler tube handle. Remove excess adhesive. Position in bed and align with center pivot prior to Loctite application.

** Apply Loctite 290 Stock No. 0220-5031-300. Remove excess adhesive (center bushings only). Position flange against retaining ring prior to Loctite application.

† Apply Loctite 242 Stock No. 0220-5017-300 sparingly.

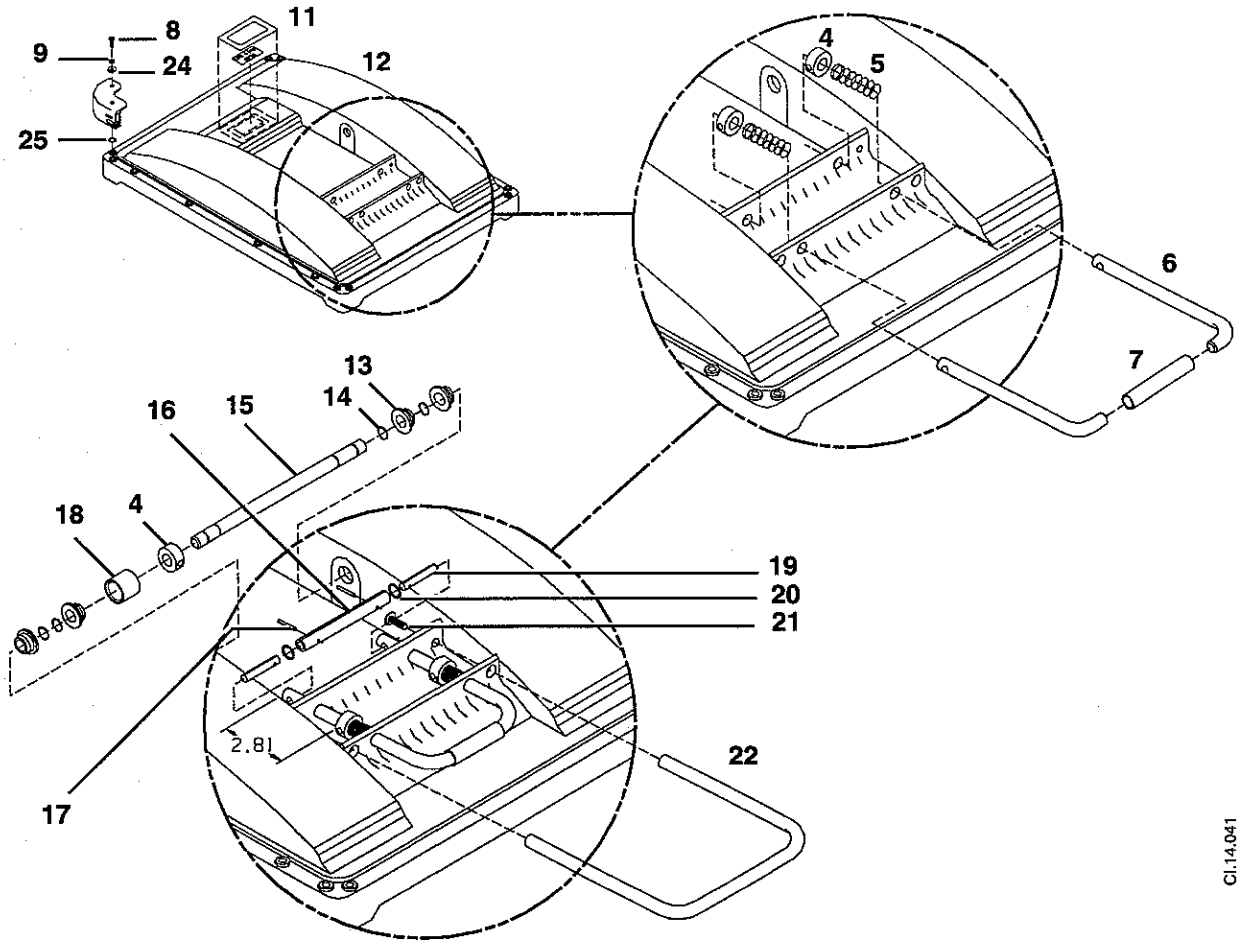

Figure 7-24
Model 3500 Bed Assembly

7.25 Model 3500 Bassinet

	Description	Stock Number
1.	Cover, Cabinet (beige)	6600-0657-500
	Cover, Cabinet (grey)	6600-0657-501
2.	Screw, 1/4-20 x 3.75 Cap	6600-0186-400
3.	Bracket, Indexing Pivot (beige)	6600-0282-500
	Bracket, Indexing Pivot (light grey)	6600-0282-501
4.	Knob, Docking†	6600-0174-400
5.	O-ring, .375 ID .562	6600-0402-400
6.	Rod, Thd, .164 x 32 x 3.5 stl pl§	6600-0503-400
7.	Rod, Thd, .164 x 32 x 3 stl pl§	6600-0502-400
8.	Nut, Kep, #8-32 w/ Ext Lkwshr	0202-1131-300
9.	Washer, Neoprene	6600-0504-400
10.	Rod, Docking	6600-0289-500
11.	Washer, Flt, .63 OD .38 ID x .06 sst	6600-0173-400
12.	Spring, Tilt	6600-0060-400
13.	Collar, Docking	6600-0176-400
14.	Washer	0202-4004-300
15.	Bearing, Docking Plastic^	6600-0305-500
16.	Plunger, Docking	6600-0290-500
17.	Pin, Spring, 0.125 x 1.0 sst	6600-0172-400
18.	Bracket, Dock Left	6600-0292-500
19.	Screw, 10-24 x 1-1/4 trs ph*	0140-6130-120
20.	Washer, lk. #10, .047T	0202-3015-340
21.	Washer, .193 ID, .438 OD	6600-0494-400
22.	Bracket, Dock Right	6600-0291-500
23.	Caster, non-locking	6600-0167-400
24.	Screw, 5/16-18 x 1**	0144-2440-216
25.	Washer, lk., int, 5/16, st	0202-3418-300
26.	Caster, Locking	6600-0166-400
27.	Rod, Pivot, Bed Tilt	6600-0285-500
28.	Collar, Setscrew, 0.5 Dia	6600-0169-400
29.	Spacer	6600-0287-500
30.	Warning label (5 lbs limit)	see label section
31.	Warning label (8 lbs limit)	see label section
32.	Casting base weight	0217-5038-100
33.	Nut, hex 5/16-18	6600-0071-200
34.	Carriage bolt	6600-0446-400
35.	Nut, elastic 1/4-20	0144-3536-113
36.	Lock	6600-0213-400
37.	Washer .175 ID x .875 OD	0402-1133-300
38.	Nut, elastic 8-32 stop	0202-1008-300

Parts not shown

Drawer slide, 16" long with rollers, left	6600-0331-500
Drawer slide, 16" long with rollers, right	6600-0332-500
Drawer rail, 16" long with rollers, left	6600-0202-400
Drawer rail, 16" long with rollers, right	6600-0204-400
Drawer slide, 18" long with ball bearings, left	6600-0133-400
Drawer slide, 14" long with ball bearings, right	6600-0132-400
Drawer slide, 14" long with ball bearings, left	6600-0134-400
Pass through drawer rail and slide	6600-0425-800

* Torque 35 in. lb. ± 5 in. lb.

** Torque 105 in. lb. ± 10 in. lb.

† Apply Loctite 242 Stock No. 0220-5017-300 sparingly.

§ Apply Loctite 290 Stock No. 0220-5031-300 sparingly to top end only.

^ Apply silicone rubber sealant Stock No. 0220-5250-300 under flange before insertion.

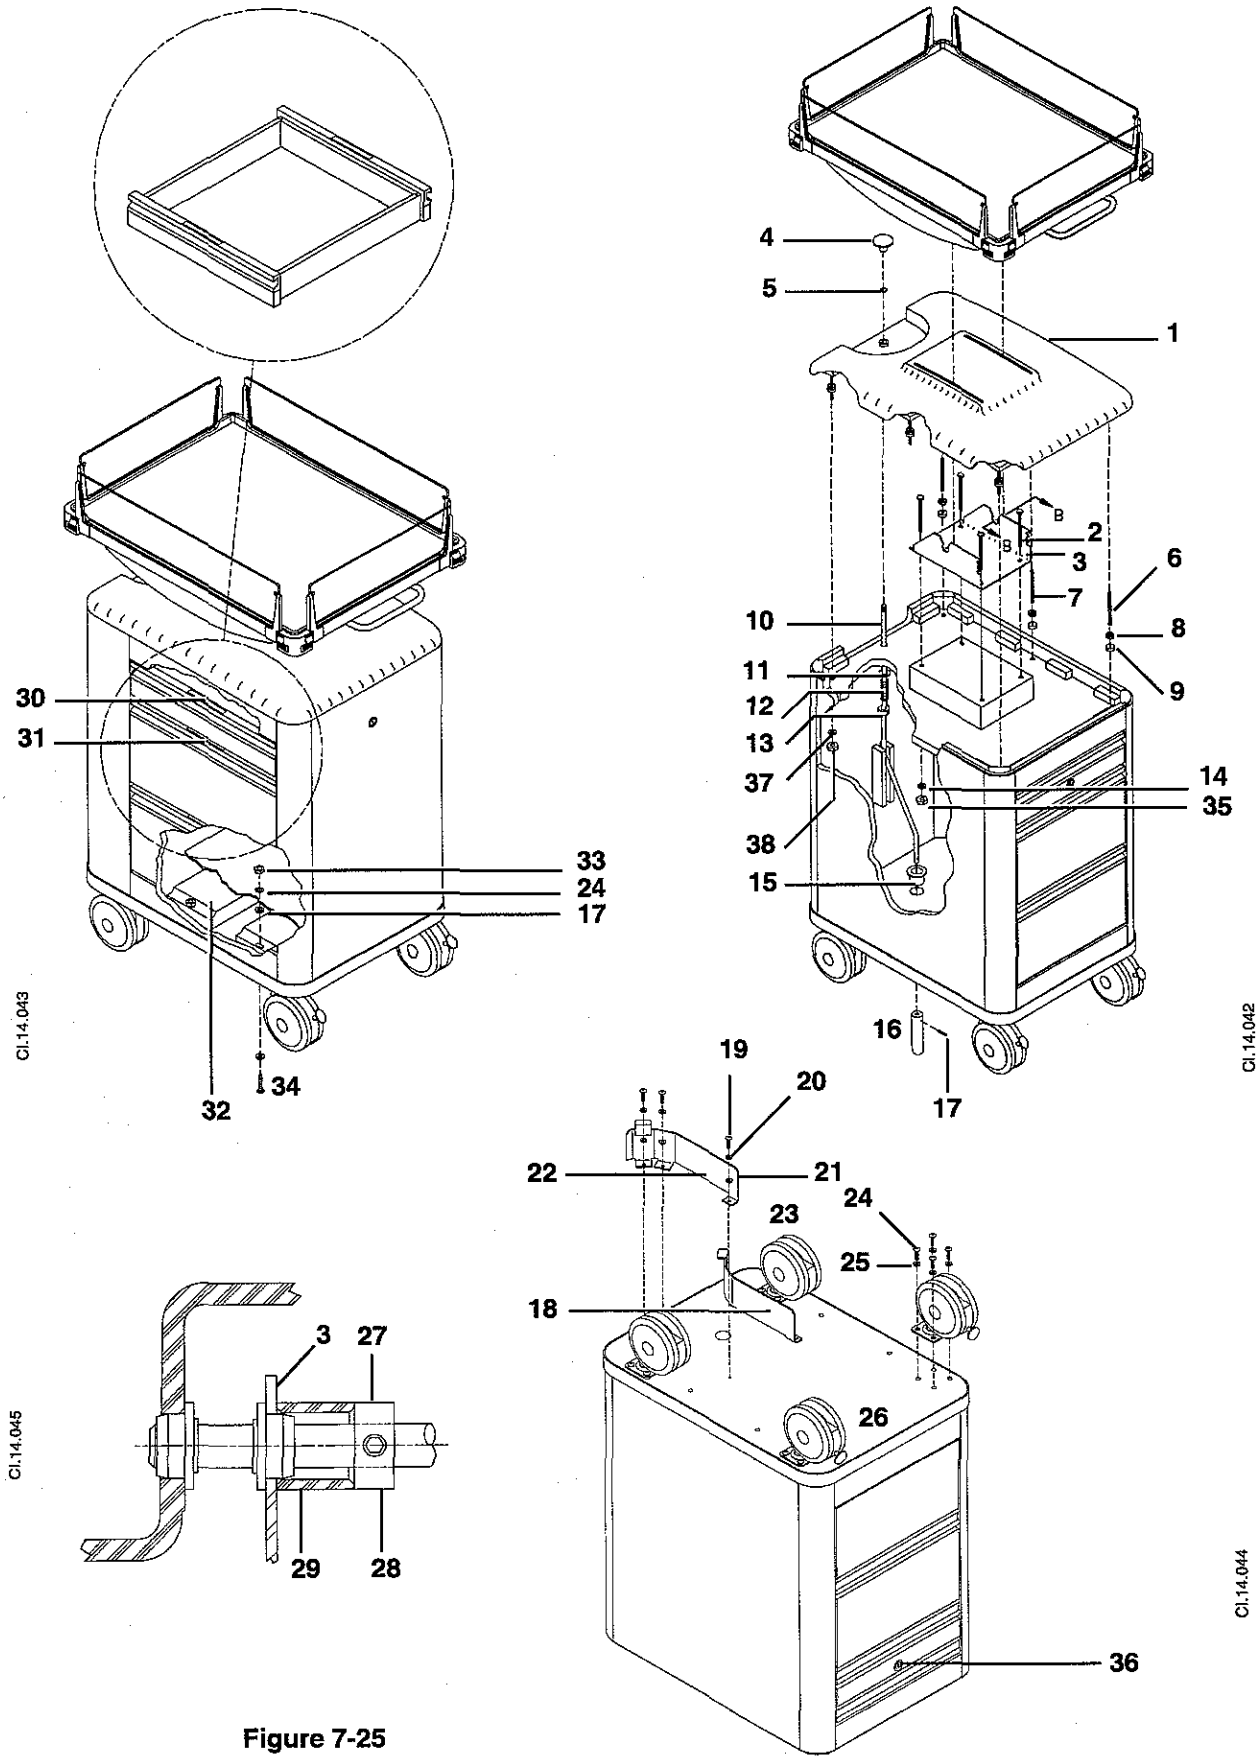

Figure 7-25
Model 3500 Bassinet

7.26 Drawer Assembly

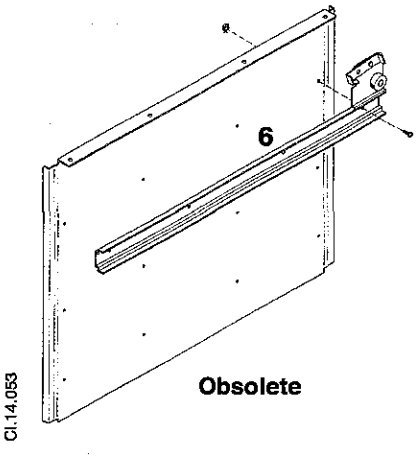

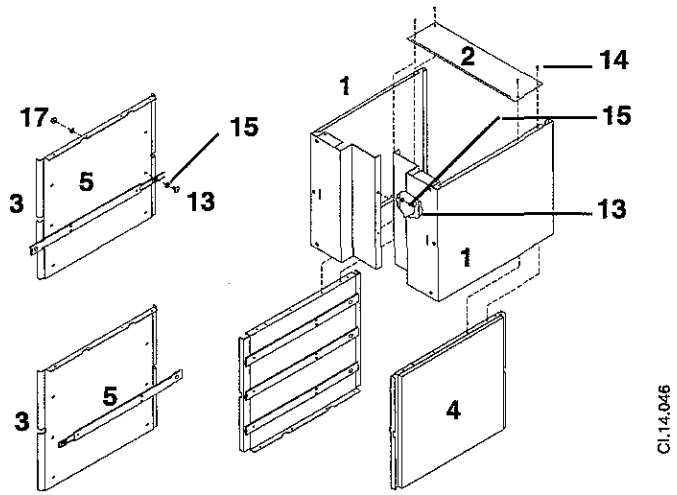

	Description	Stock Number
1.	Outer cabinet panel (beige)	0217-5356-710
	Outer cabinet panel (light grey)	6600-0817-501
2.	Cabinet side spacer	0214-1574-510
3.	Drawer side panel	0214-1572-510
4.	Insulation	6600-0190-500
5.	Drawer slide channel*	6600-0133-400
6.	Right slide channel (old) shown	0203-2510-300
	Left slide channel (old)	0203-2509-300
7.	Plastic Drawer Kit, shallow (beige) (includes slides)**	6600-0058-850
	Plastic Drawer Kit, shallow (light grey) (includes slides)**	6600-0059-850
8.	Drawer front, shallow (blue)†	0214-1576-510
	Drawer front, shallow (light grey)	6600-0863-501
9.	Drawer slide spacer	6600-0089-500
10.	Nut, hex elastic locking 6/32	6600-0111-400
11.	Right drawer slide track	6600-0132-400
	Right drawer slide track (old)	0203-2507-400
12.	Left drawer slide track	6600-0134-400
	Left drawer slide track (old)	0203-2508-400
13.	Screw, 6-32 x 3/8	0140-6624-106
14.	Screw, #8 x 3/8	6600-0471-400
15.	Lock washer, external	6600-0259-400
16.	Flat washer, #6	6600-0378-400
17.	Nut, elastic	6600-0111-400
18.	Rivet	6600-0155-400
19.	Screw, #10-24 x 3/8	6600-0250-400
20.	Lock washer, #10 internal	0144-1110-131
21.	Screw, 8-32 x 3/8	0140-6127-106
22.	Lock washer, #8 internal	6600-0262-400
23.	Washer (stationary drawers only)	6600-0252-400
24.	Washer, split ring (stationary drawers only)	0144-1114-331
25.	Bolt, 1/4 - 20 x 1 1/2 (stationary drawers only)	6600-0012-400
	Bolt, flat hd, 1/4 - 20 x 1 5/8 (rotating drawers only)	6600-0447-400
26.	Cabinet top, large - (beige) (shown)	6600-0601-500
	Cabinet top, large - (light grey)	6600-0601-501
27.	Cabinet top, small - (beige) (used on small bed stationary drawer cabinets only)	6600-0025-500
	Cabinet top, small - (light grey)	6600-0025-501
28.	Plastic drawer, deep - (includes slides) (light grey)**	6600-0060-850
29.	Drawer front, deep - (light grey)	6600-0838-501
	Drawer front, deep - (blue)	6600-0838-500
30.	Rear cabinet cover (beige)	6600-0590-500
	Rear cabinet cover (light grey)	6600-0590-501
31.	Hook bracket (units with AAN & HCA serial number)	0214-1573-542
32.	Plate bracket (units with AAN & HCA serial number)	0214-1577-542
33.	Lock washer, #8 (units with AAN & HCA serial number)	6600-0262-400
34.	Screw, 8-32 x 9/16 (units with AAN & HCA serial number)	0140-6627-109

* Apply Lubriplate (0616-0203-300) to contact areas.

† Use tape transfer acrylic (0220-5119-300) to attach front to drawer.

** Does not include drawer fronts.

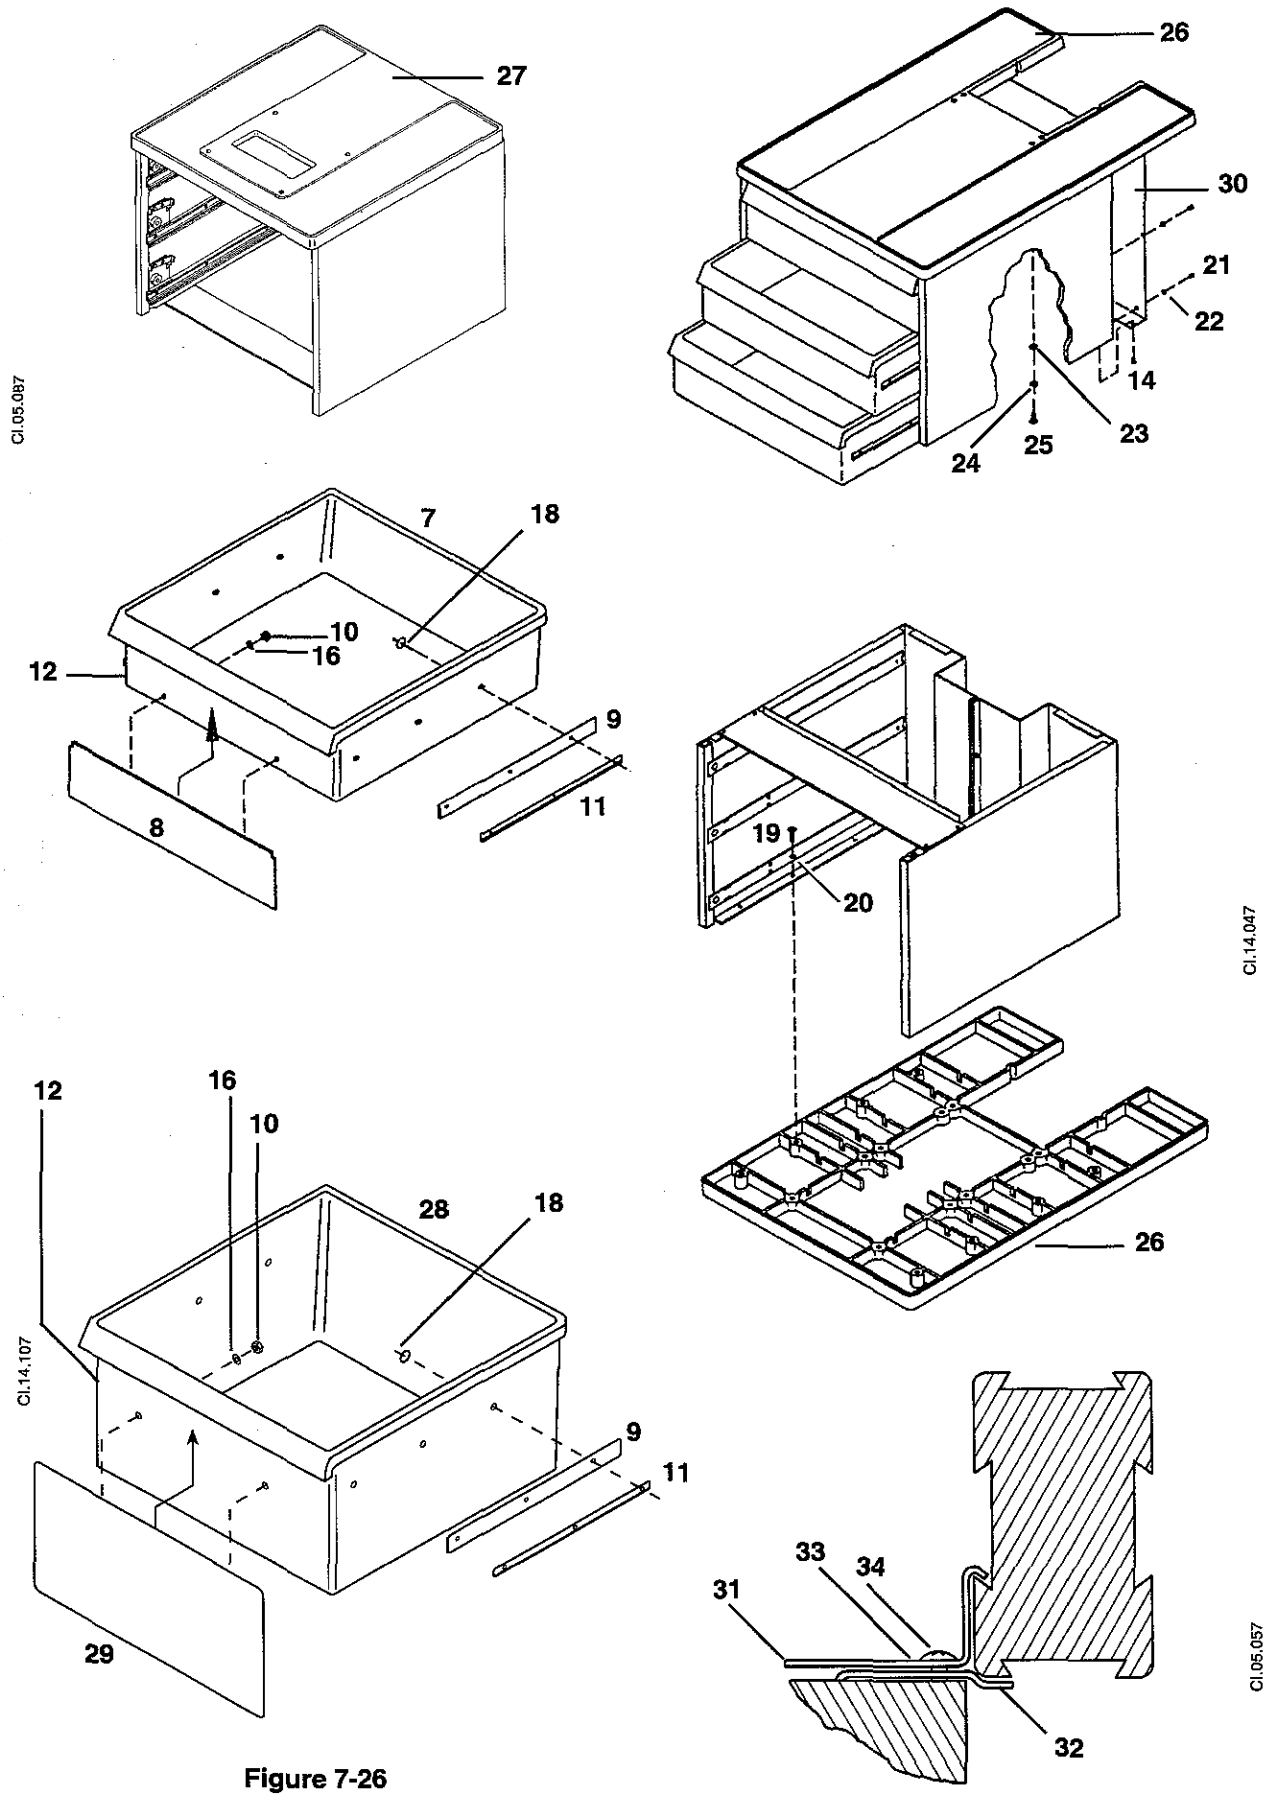

Figure 7-26
Drawer Assembly

7.27 Rotating drawer assemblies

	Description	Stock Number
1.	Lower rotating plate	6600-0573-500
2.	Drawer cover (beige)	6600-0583-500
	Drawer cover (light grey)	6600-0583-501
3.	Upper rotating plate (model 2001/3300)	6600-0574-501
	Upper rotating plate§ (model 4300/4400/5000)	6600-0574-500
4.	Pinch shield*	6600-0582-500
5.	Molded top (beige) *	6600-0601-500
	Molded top (light grey)	6600-0601-501
6.	Rear cover (beige)	6600-0590-500
	Rear cover (light grey)	6600-0590-501
7.	Carriage bolt, 1/2-13 x 1.75	6600-0580-500
8.	Bearing ring†	6600-0576-500
9.	Shoulder washer	6600-0581-500
10.	Slotted hex nut	6600-0424-400
11.	Cotter pin	6600-0426-400
12.	Cam follower †	6600-0577-500
13.	Roller	6600-0578-500
14.	Spacer	6600-0427-400
15.	Extension spring	6600-0425-400
16.	Screw, 6-32 x 1" Flt Hd	6600-0432-400
17.	Screw, 10-24 x 3/8 Ph Hd*	6600-0250-400
18.	Screw, #8 x 3/8	0142-4234-106
19.	Screw, 8-32 x 3/8 Ph Hd	0140-6127-106
20.	Nut, elastic	6600-0111-400
21.	Lock Washer, #8 Internal	6600-0262-400
22.	Bearing	6600-0428-400
23.	Screw, 6-32 x 3/8 Ph Hd	0140-6124-106
24.	Lock washer, #10 internal	0144-1110-131

* Apply a 1/8" thick bead of Sealant Silicone Rubber (0220-5250-300) any where item #4 and #5 contact.

† Apply Lubriplate (0616-0203-300) to any areas subject to friction.

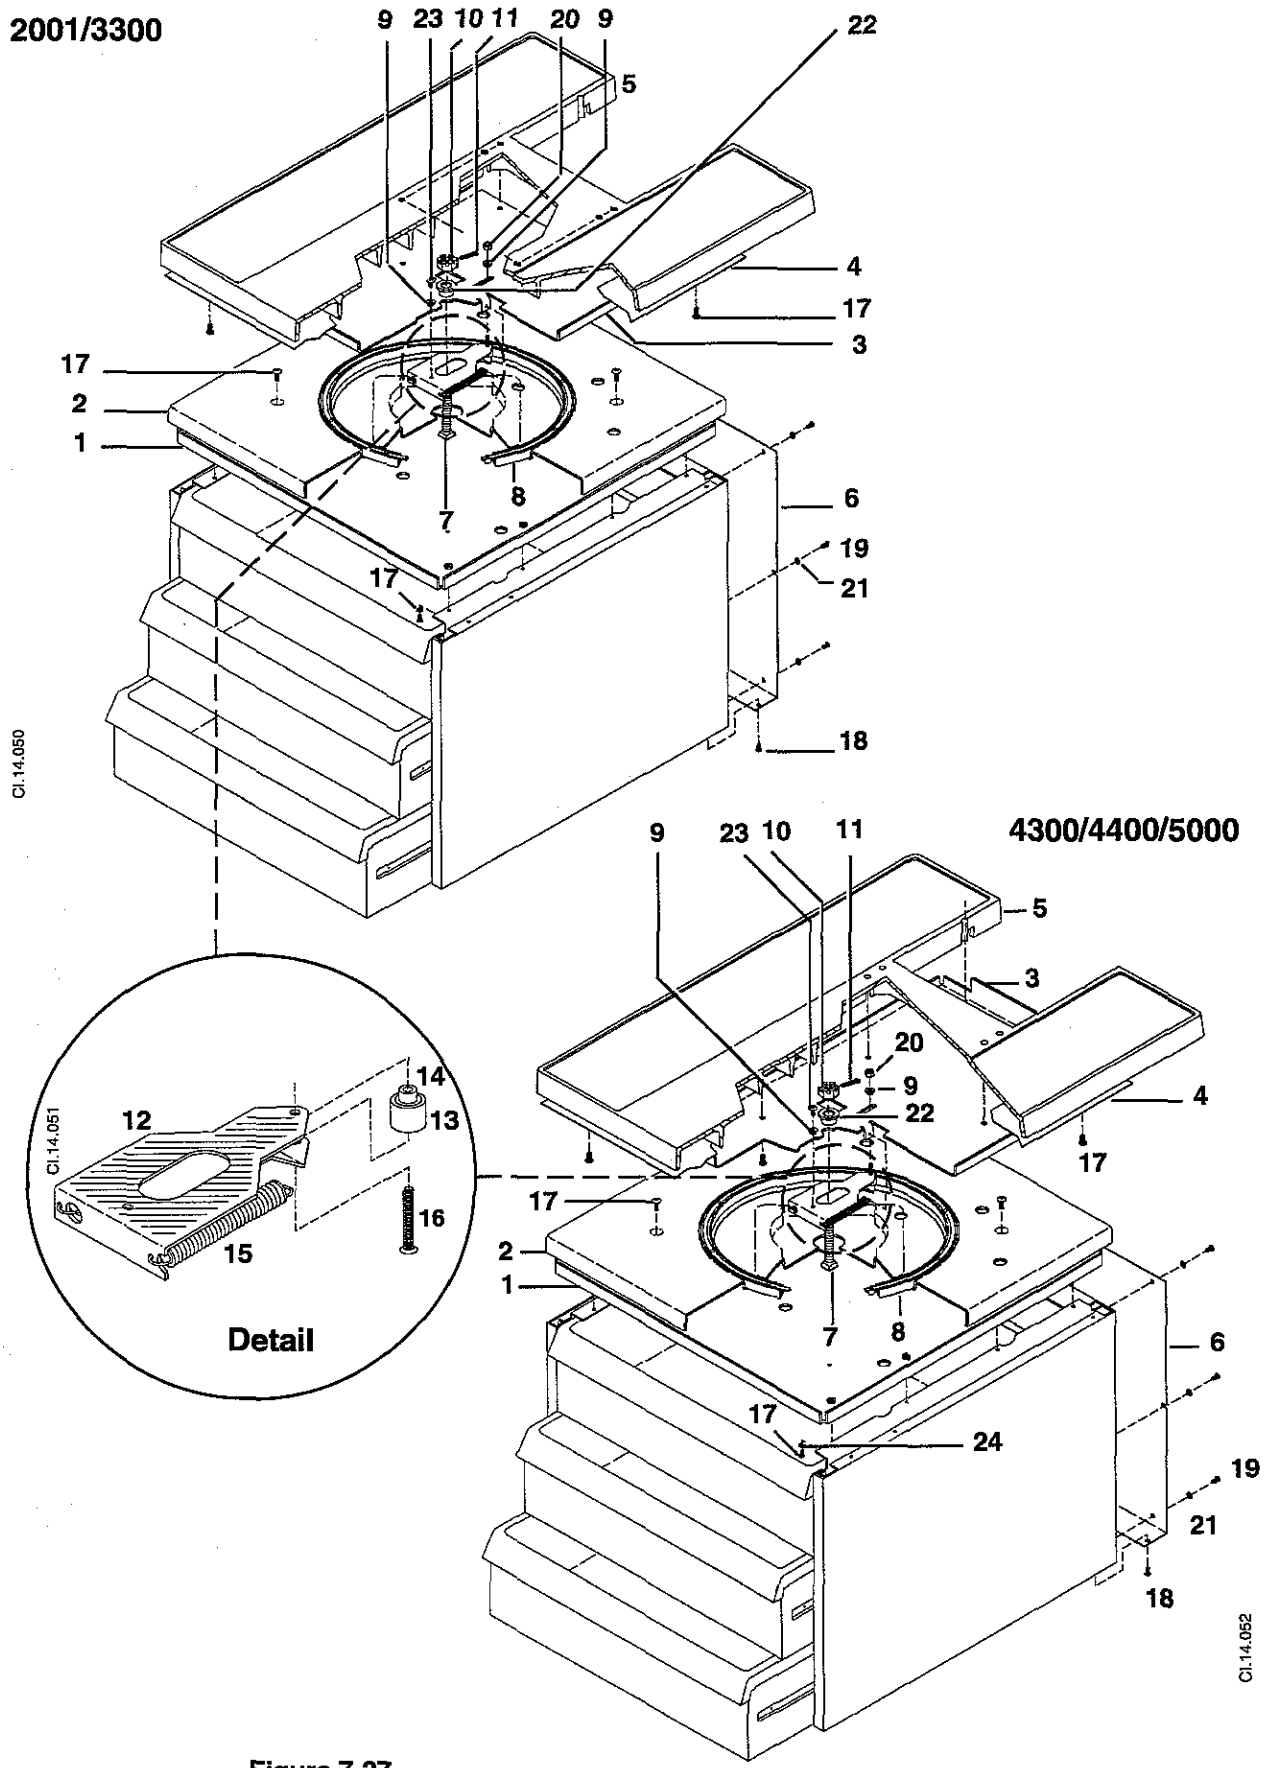

Figure 7-27
Rotating drawer assemblies

7.28 Air/Oxygen Yoke and Regulator Assembly1-Regulator

	Description	Stock Number
1.	O_2 Gauge, 3000 lbs (210 kg/cm^2)	6600-0269-400
2.	Label, Oxygen Yoke Assembly	see label section
3.	Plug 1/8 nptm w/Hex Socket	6600-0191-400
4.	Button Plug	0216-2593-300
5.	O_2 Manifold Yoke	0219-4002-531
6.	Air Gauge, 3000 lbs (210 kg/cm^2)	6600-0269-401
7.	Label, Air Yoke Assembly	see label section
8.	Socket Head Set Cup Screw 6-32 x 3/8	0141-4124-112
9.	Air Manifold Yoke	6600-0023-500
10.	Air Outlet DISS 1/8 nptm Single Check	6600-0021-400
11.	Screw 1/4 -20 x 3/8	0140-6136-106
12.	Safety Relief Valve	6600-0550-800
13.	Tee, 1/8 nptf 1/8 nptm 3/16	0213-4127-300
14.	Bushing 1/8 nptf 1/4 nptm	6600-0035-300
15.	Single Stage O_2 Regulator 8000 Series	6600-0003-700
16.	Copper Tube	0213-8022-300
17.	Hex Socket Plug 1/4 nptm	0413-3511-335
18.	Close Nipple 1/4 npt	0413-1099-325
19.	3/16 Compression Elbow 1/8 nptm	6600-0274-400
20.	O_2 Connector DISS 9/16	0204-0508-532
21.	O-Ring .250 ID .375 OD	0210-0595-300
22.	O-Ring .312 ID .437 OD	0210-0601-300
23.	Steel Ball	0409-1697-300
24.	O_2 DISS Outlet 1/8 nptm Single Check	0205-0540-800
	Piston	0205-0413-535
	O-Ring	0210-0559-300
	Adapter	0205-0412-535
25.	Screen*	6600-0461-400
26.	Gauge lens	0212-0066-300
27.	Cylinder Bumper	6600-0400-500
28.	Screw, Phillips FL type F, # 8 x 5/8	0142-2244-210

Note: Seal pipe threads with Teflon tape.

* Some older units have a spring instead of a screen.

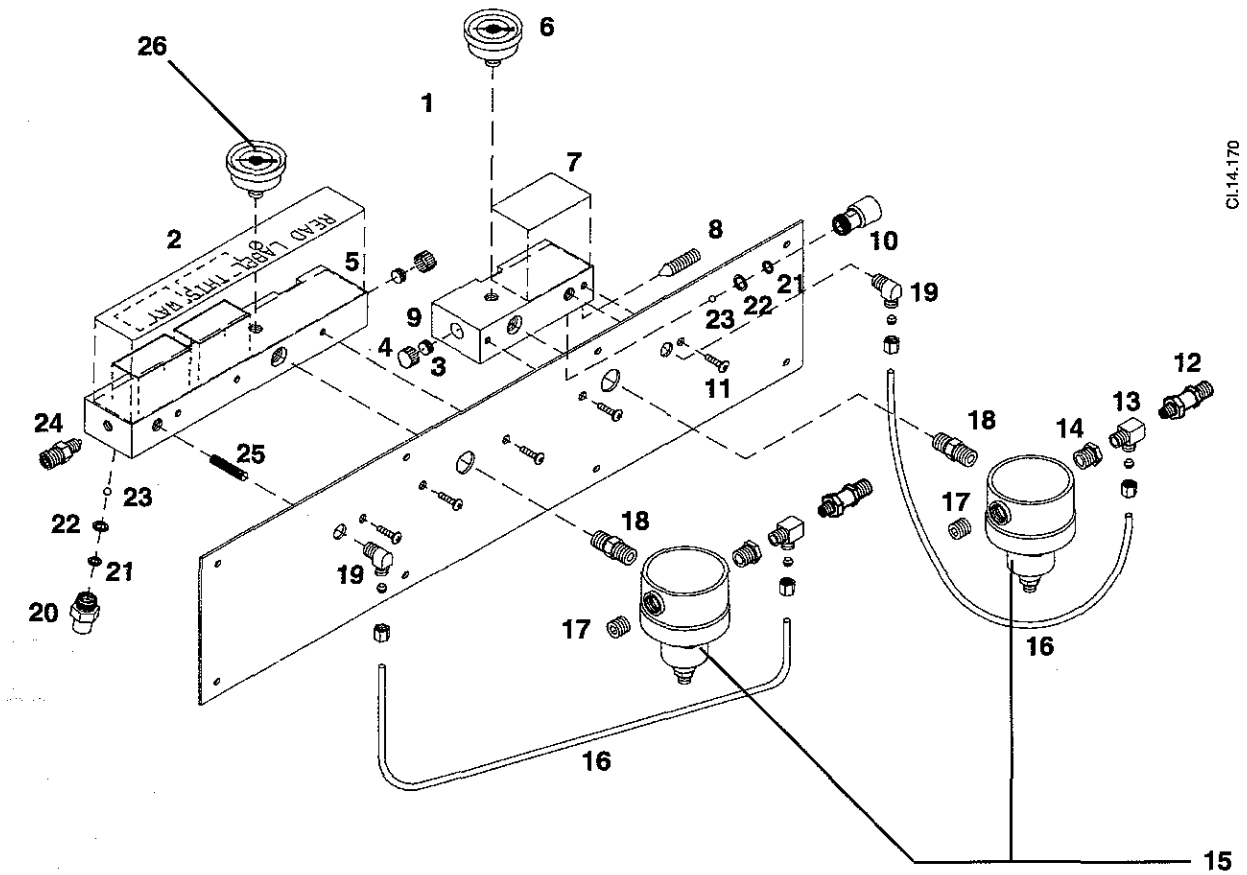

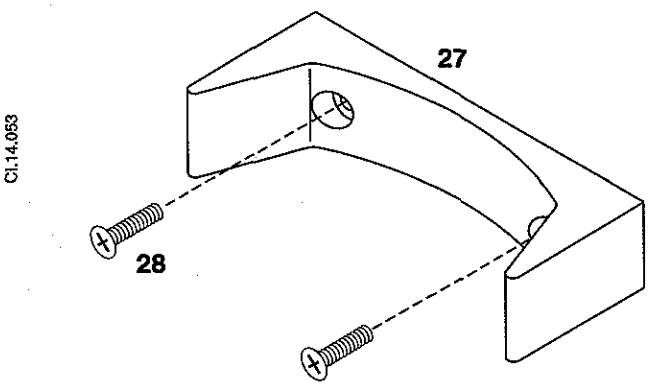

Figure 7-28
Air/Oxygen Yoke and Regulator Assembly 1 - Regulator

7.29 Air/Oxygen Yoke and Regulator Assembly 2 - Manifold Block

	Description	Stock Number
1.	Split Ring, 1 inch	0203-2390-300
2.	Bead Chain Clip	0203-0100-300
3.	Bead Chain, No. 10 (3/16 inch)	0203-0068-500
4.	Cylinder Wrench	6600-0308-400
5.	Cylinder guard (model 5000 only)	6600-0040-500
6.	Tee Handle	6600-0270-401
7.	Screw 3/8-16 x 2 1/4	0144-2145-224
8.	Sleeve	6600-0271-400
9.	Gate Hanger	6600-0348-500
10.	Yoke Spacer	6600-0121-400
11.	Yoke Plug	6600-0399-500
12.	Gasket	6600-0152-400
13.	Yoke Check Valve*	0207-8081-800
	Strainer Nipple	0206-2805-725
14.	Groove Pin	0143-3210-410
15.	Front Body Air DISS Check Unit	6600-0402-500
16.	O-Ring	6700-0136-500
17.	O-Ring	0210-0591-300
18.	Air Primary Check	0221-3661-535
19.	Spring	6600-0283-400
20.	Washer	6600-0032-300

* Torque to 15 -20 ft./lbs. Replace sealing washer (Item 20) when replacing check valve.

Note: Seal pipe threads with Teflon tape.

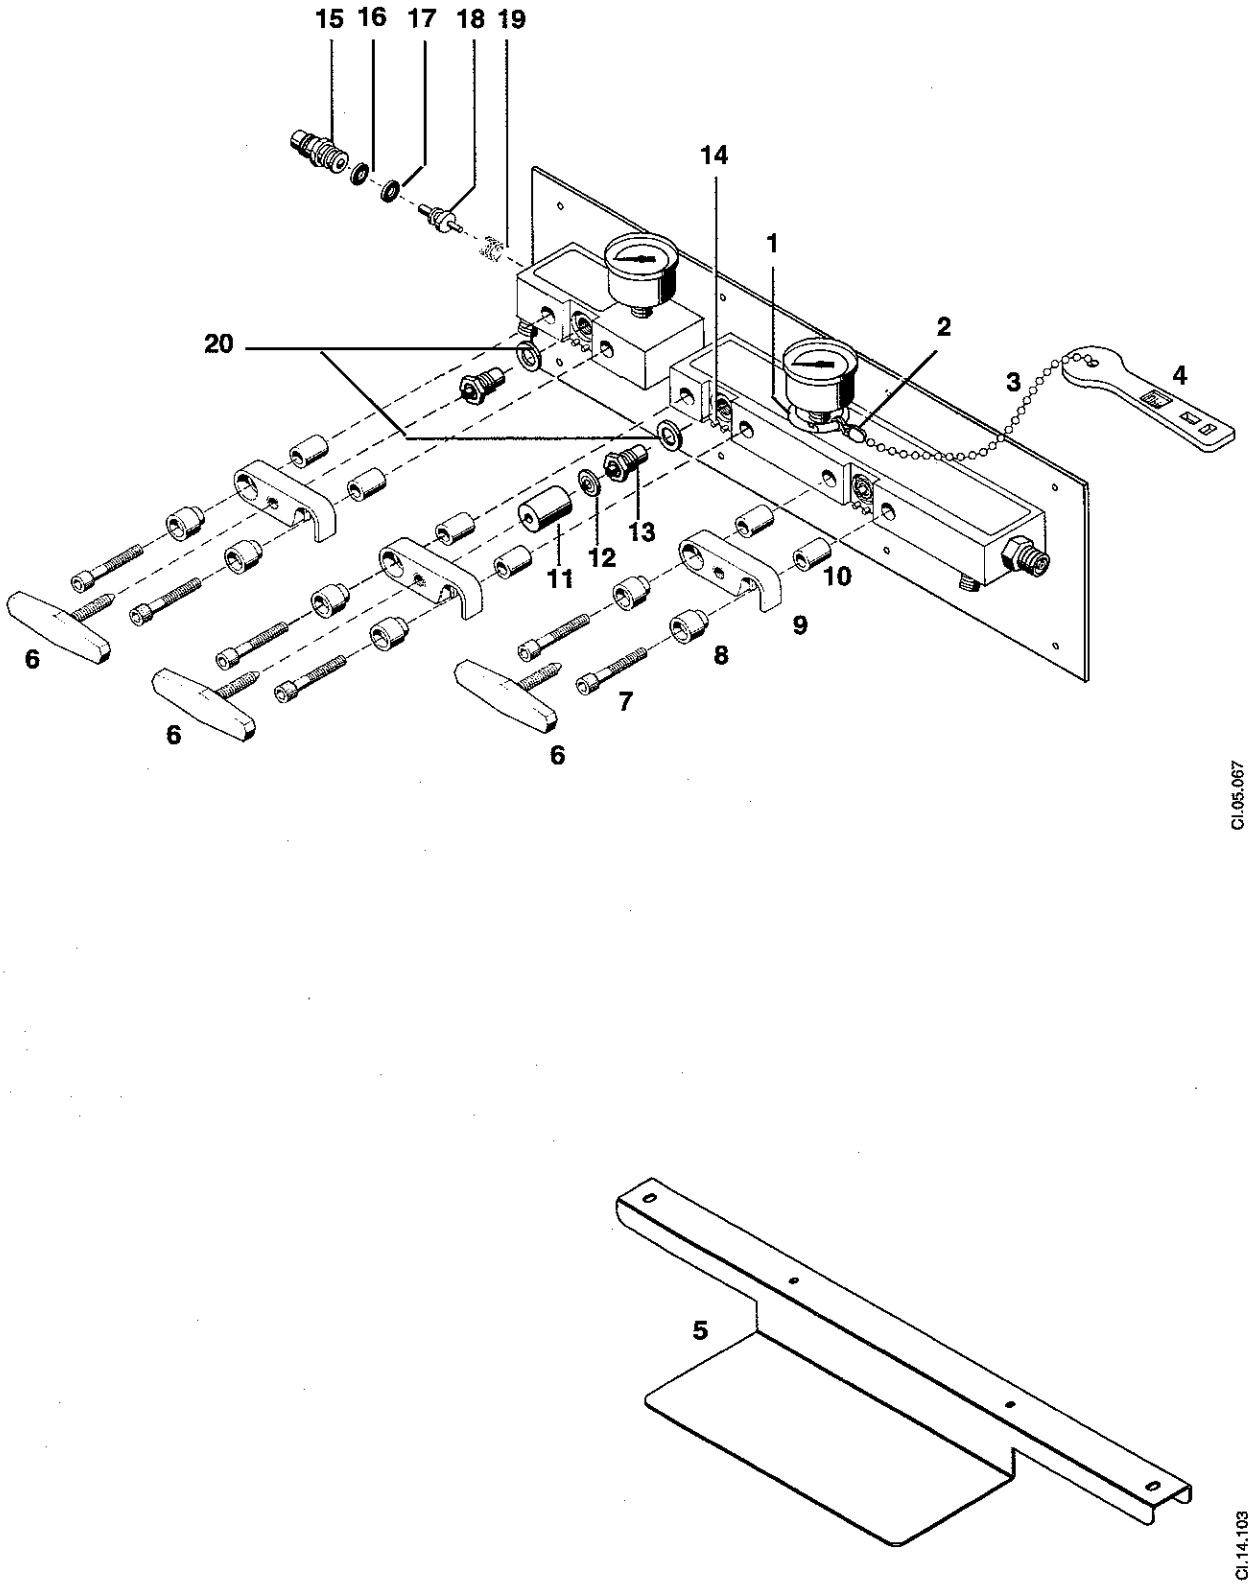

Figure 7-29
Air/Oxygen Yoke and Regulator Assembly 2 - Manifold Block

7.30 Oxygen Yoke and Regulator Assembly 1 - Regulator

Description	Stock Number
1. O_2 Gauge, 3000 lbs (210 kg/cm^2)	6600-0269-400
2. Label, Oxygen Yoke Assembly	see label section
3. Plug 1/8 nptm w/Hex Socket	6600-0191-400
4. Button Plug	0216-2593-300
5. O_2 Manifold Yoke	0219-4002-531
6. Screw 1/4-20 x 3/8	0140-6136-106
7. Safety Relief Valve	6600-0550-800
8. Tee, 1/8 nptf 1/8 nptm 3/16	0213-4127-300
9. Bushing 1/8 nptf 1/4 nptm	0413-3350-300
10. Single Stage O_2 Regulator (8000)	6600-0003-700
11. Copper Tube	0213-8022-300
12. Hex Socket Plug 1/4 nptm	0413-3511-335
13. Close Nipple 1/4 npt	0413-1099-325
14. 3/16 Compression Elbow 1/8 nptm	6600-0274-400
15. O_2 Connector DISS 9/16	0204-0508-532
16. O-Ring .250 ID .375 OD	0210-0595-300
17. O-Ring .312 ID .437 OD	0210-0601-300
18 Steel Ball	0409-1697-300
19. O_2 DISS Outlet 1/8 nptm Single Check	0205-0540-800
Piston	0205-0413-535
O-Ring	0210-0559-300
Adapter	0205-0412-535
20. Screen*	6600-0461-400
21. Gauge lens	0212-0066-300

Note: Seal pipe threads with Teflon tape.

* Some older units have spring instead of a screen.

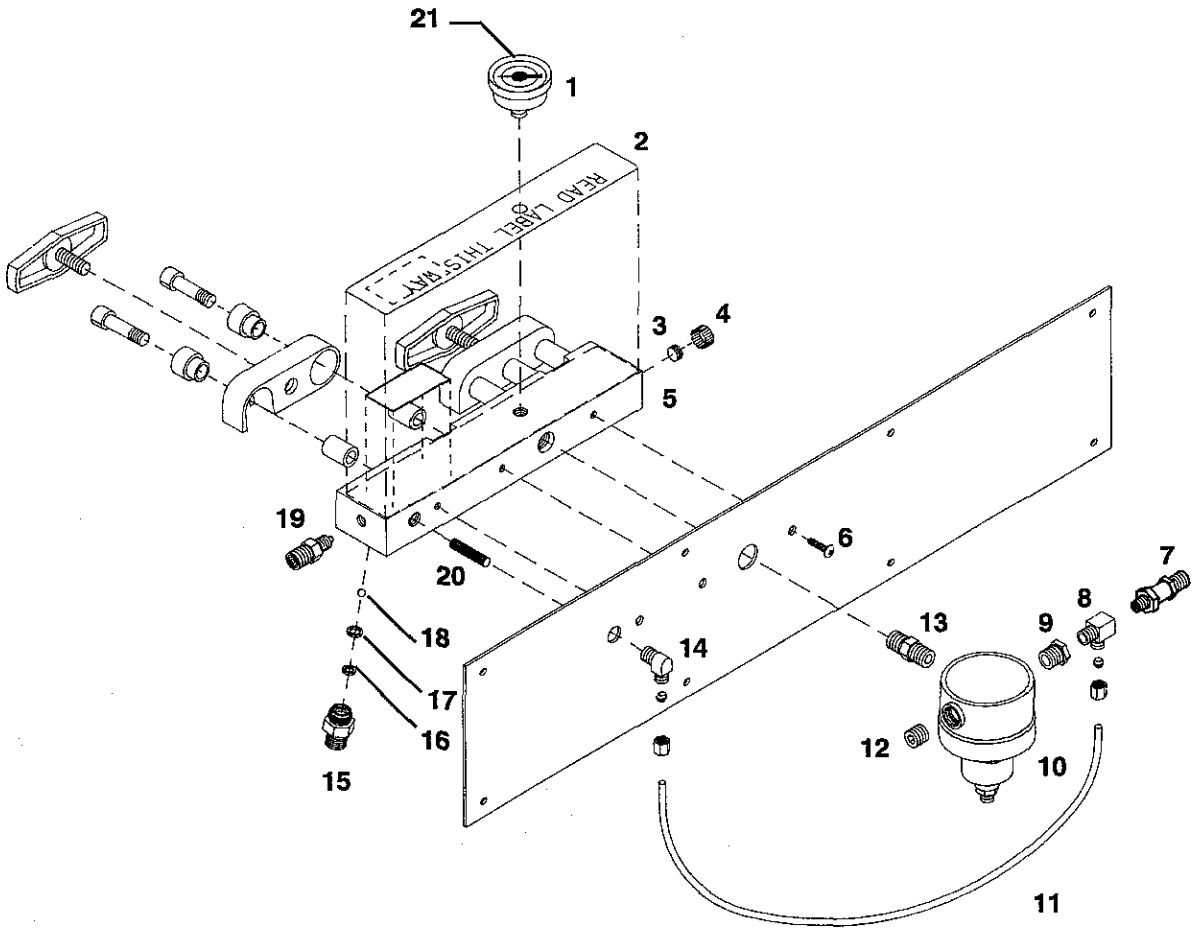

Figure 7-30
Oxygen Yoke and Regulator Assembly 1 - Regulator

7.31 Oxygen Yoke and Regulator Assembly 2 - Manifold Block

	Description	Stock Number
1.	Split Ring, 1/2 inch	0203-2390-300
2.	Bead Chain Clip	0203-0100-300
3.	Bead Chain, No. 10 (3/16 inch)	0203-0068-500
4.	Cylinder Wrench	6600-0308-400
5.	Cylinder guard (Model 5000 only)	6600-0040-500
6.	Tee Handle	6600-0270-401
7.	Screw 3/8-16 x 2-1/4	0144-2145-224
8.	Sleeve	6600-0271-400
9.	Gate Hanger	6600-0348-500
10.	Yoke Spacer	6600-0121-400
11.	Yoke Plug	6600-0399-500
12.	Gasket	6600-0152-400
13.	Yoke Check Valve*	0207-8081-800
	Strainer Nipple	0206-2805-725
14.	Washer	6600-0032-300
15.	Groove Pin	0143-3210-410
16.	Gauge lens	0212-0066-300
17.	Lock washer, pyramidal (model 5000 only)	0202-3419-300
18.	Screw, button head cap, 5/16-1 (model 5000 only)	0144-2440-216

* Torque to 15 -20 ft./lbs.

Note: Seal pipe threads with Teflon tape.

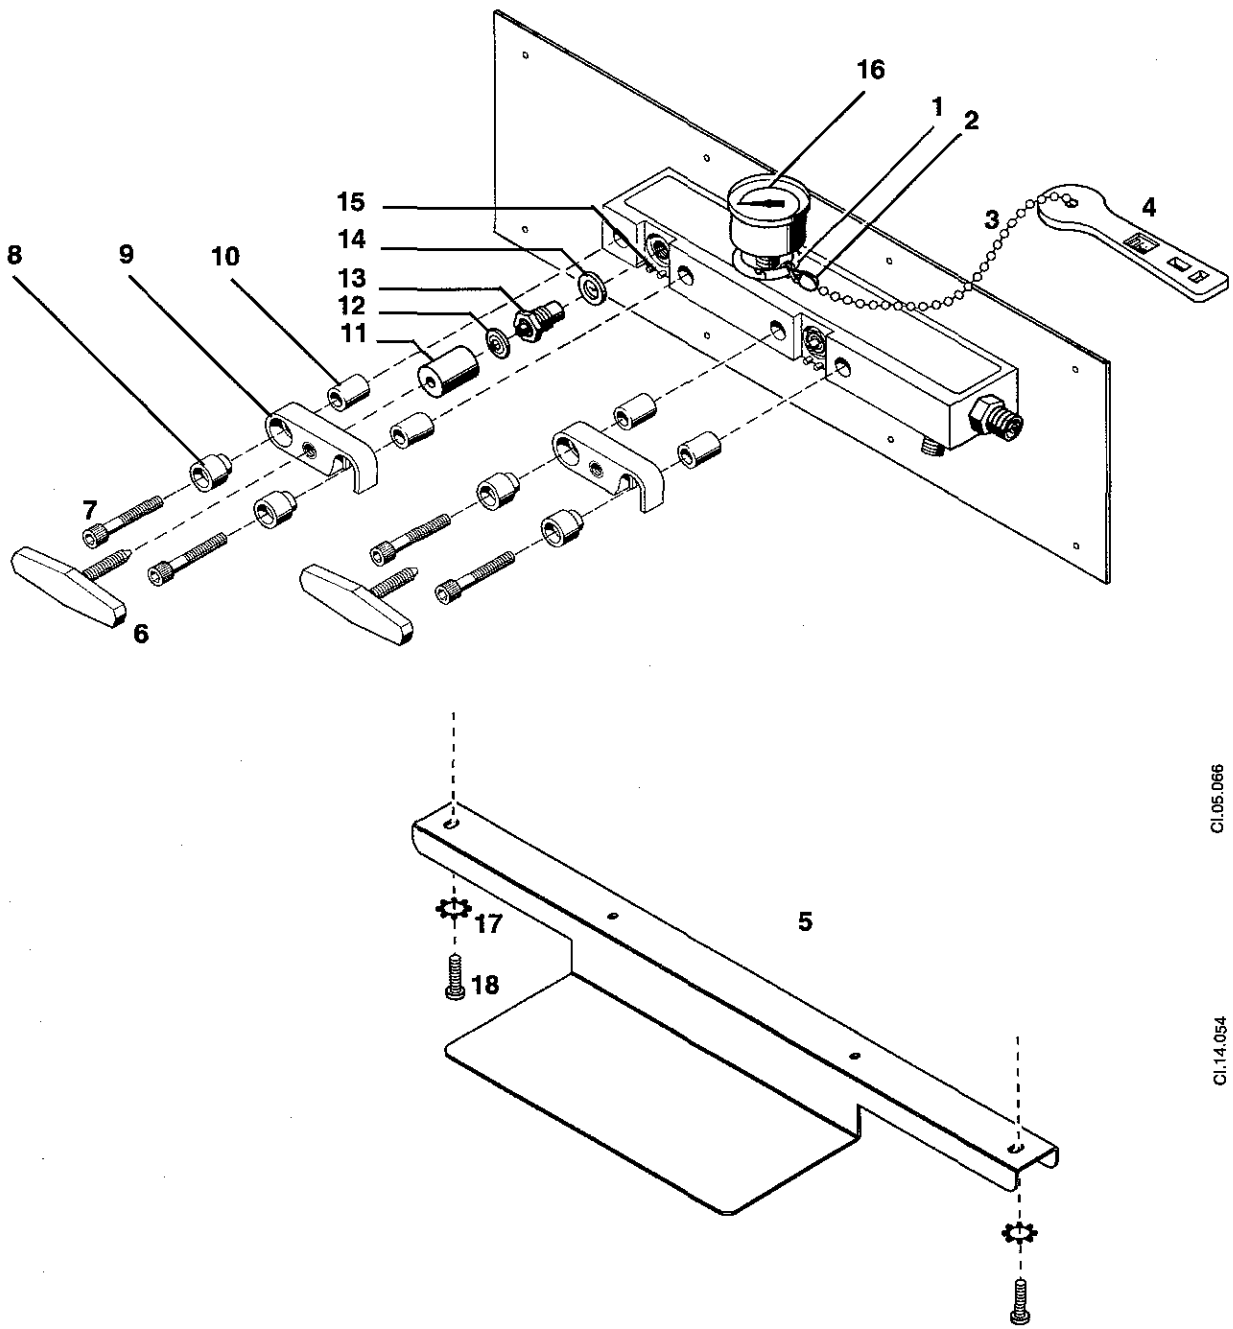

Figure 7-31
Oxygen Yoke and Regulator Assembly 2 - Manifold Block

7.32 Instrument Shelf

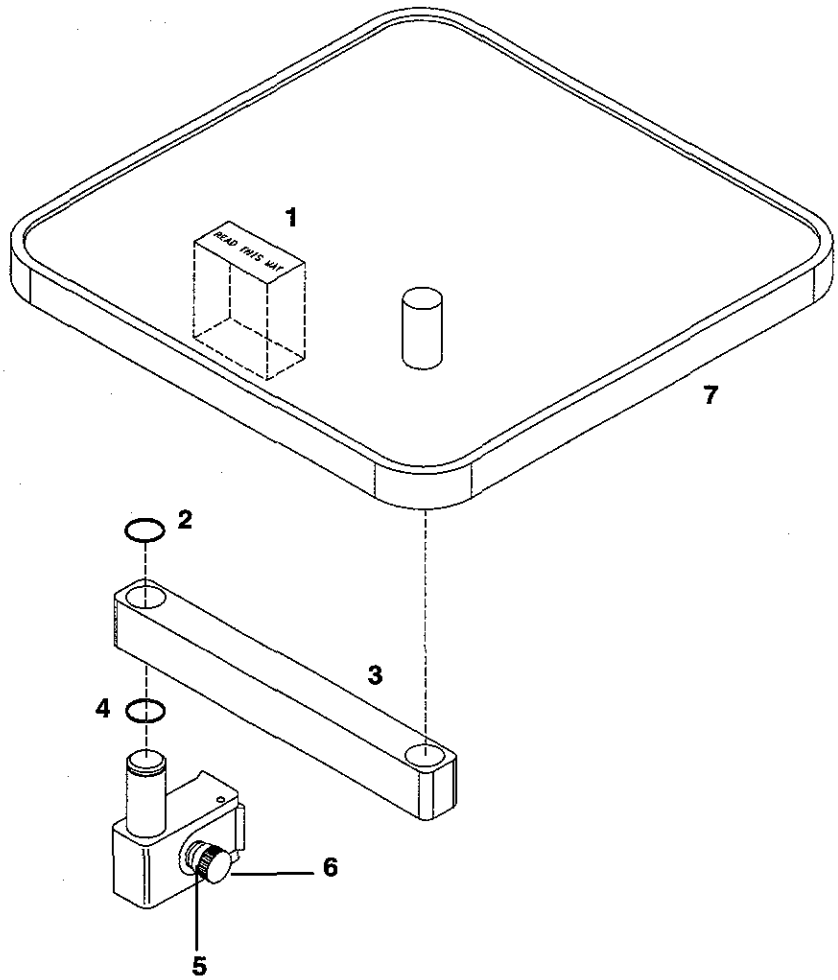

	Description	Stock Number
1.	Label, Shelf Load Limit (20 lbs)	See label section
2.	Locking Ring	0203-5186-300
3.	Swivel Arm	0217-5337-552
4.	Washer	0202-0096-300
5.	Washer	0202-0095-300
6.	Knob†	0217-5335-300
7.	Swivel Shelf, 12 x 12 (beige)*	6600-0482-500
	Swivel Shelf, 12 x 12 (light grey)*	6600-0482-501

† Apply Lubriplate (6600-0095-300) to the knob threads.

* Order item 1 when replacing shelf

Figure 7-32
Instrument Shelf, 12 x 12 (30cm x 30cm)
0217-5365-800 (beige)
6600-0513-801 (light grey)

7.33 Monitor Shelf

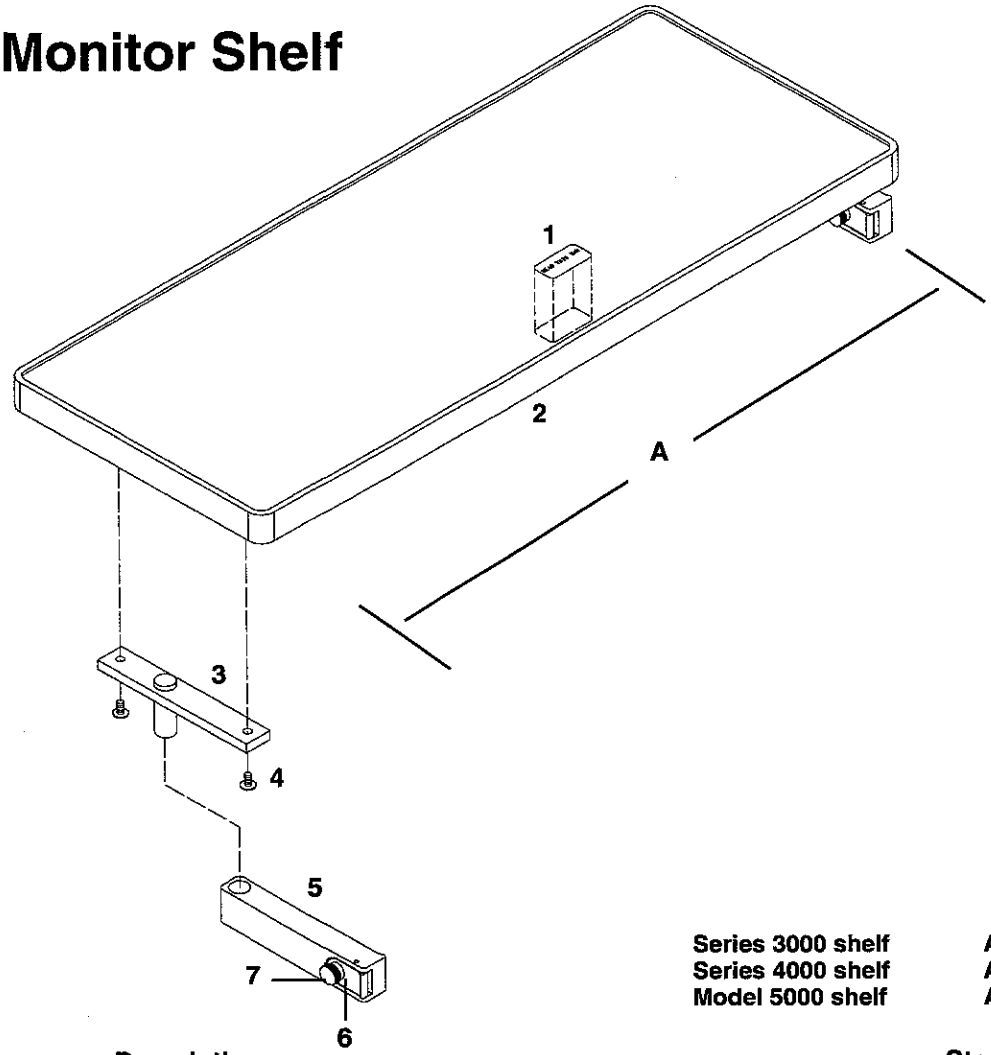

Series 3000 shelf	**A= 19.75"**
Series 4000 shelf	**A= 24"**
Model 5000 shelf	**A= 27.75"**

	Description	Stock Number
1.	Label, Shelf Load Limit (50 lbs)	See label section
2.	Monitor Shelf 12 x 26 (beige)*	6600-0481-500
	Monitor Shelf 12 x 26 (light grey)*	6600-0481-501
	Monitor Shelf 12 x 30.5 (Model 5000)*	0217-5349-100
3.	Shelf Support	6600-0811-501
4.	Screw 1/4 -20 x 5/8*	6600-0394-400
5.	Mounting block assy.	6600-0290-800
6.	Washer (included with item 5)	0202-0095-300
7.	Knob† (included with item 5)	0217-5335-300

* Use Loctite 242 on threads, tighten, then loosen 1/2 turn.

* Order item 1 when replacing shelf

† Apply Lubriplate (6600-0095-300) to the knob threads.

Figure 7-33
Monitor Shelf
Model 2001, series 3000 (beige) - 0217-5366-800
Model 2001, series 3000 (grey) - 6600-0240-801
Model 4000, 4300 and 4400 (beige) - 6600-0240-800
Series 4000, grey - 6600-0549-800
Model 5000, beige - 6600-0010-800
Model 4400, grey - 6600-0010-801

7.34 Upper bed shelf

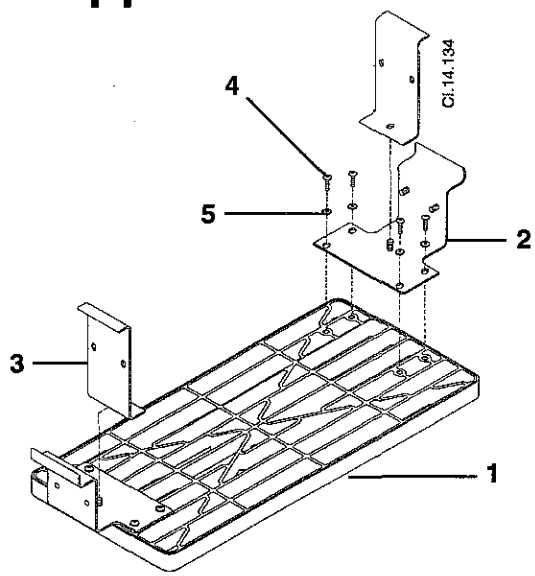

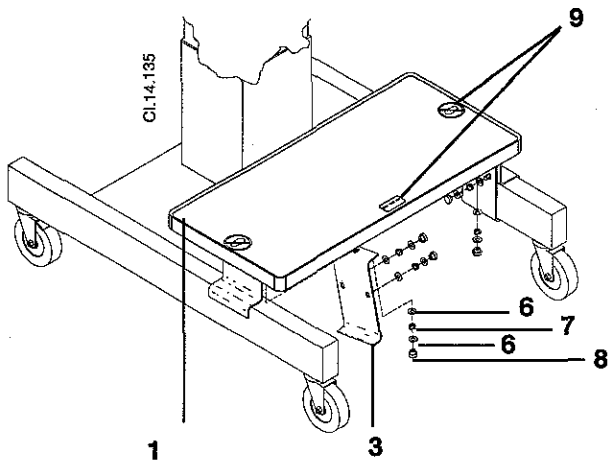

	Description	Stock Number
1.	Shelf*, 12" x 26" (beige)	6600-0481-500
	Shelf*, 12" x 26" (light grey)	6600-0481-501
2.	Upright support	6600-0695-500
3.	Bracket	6600-0694-500
4.	Screw, 1/4 - 20 x 5/8 PH	6600-0394-400
5.	Lock washer, Ext tooth	6600-0468-400
6.	Flat washer, .26 x .56x .04	0202-4526-335
7.	Lock washer, spr dbl M8 x 15.1 x 1.2	6600-0548-400
8.	Knob, 1/4 -20 insert 1.0 OD	6600-0549-400
9.	Label set	6600-1826-100

*Note: If shelf is replaced, the labels must be ordered and applied as shown in figure.

Figure 7-34

Under bed shelf
Model 4400 -6600-0497-800 (beige)
Model 4400 -6600-0497-801 (light grey)

7.35 3.5 Inch Utility Post



Cl.14.057

	Description	Stock Number
1.	Washer	0202-0095-300
2.	Knob†	0217-5335-300

† Apply Lubriplate (6600-0095-300) to the knob threads.

Figure 7-35

3.5 Inch (9cm) Utility Post
0217-5374-800